



PRELIMINARY AIR MONITORING SUMMARY

Jenkintown, PA
SPS Technologies Fire
March 4 – 5, 2025

Submitted March 6, 2025

1.0 INTRODUCTION

On February 19, 2025, CTEH was contacted to provide community air monitoring for SPS Technologies, LLC in conjunction with the United States Environmental Protection Agency (USEPA) and the Pennsylvania Department of Environmental Protection (PA DEP). CTEH initially established seven stationary real-time air monitoring locations in a perimeter around the SPS Technologies facility and adjacent residential areas on the morning of February 20, 2025. Real-time air monitoring performed by CTEH began at 1208 EST on February 20, 2025. At 1000 EST on February 22, 2025, CTEH established a Kestrel 6000 cellular weather station approximately 500 feet north of the facility. On the evening of February 22, 2025, CTEH established four additional stationary monitoring locations in community areas around the facility. Consistent with the updated Air Sampling and Analysis Plan (SAP) submitted on February 23, 2025, CTEH established two additional community stationary monitoring locations on both February 23 and February 24, 2025, bringing the total number of stationary monitoring locations to fifteen. The SAP was further updated on February 26, 2025 to reflect the removal of particulate matter monitors during rain events and a change in how monitoring stations were identified. These stationary real-time monitoring locations were established to encompass a 360° monitoring perimeter around the facility and within nearby communities.

This report summarizes real-time air monitoring data collected by CTEH personnel from approximately 0600 EST on March 4, 2025 to approximately 0600 EST on March 5, 2025.

2.0 AIR MONITORING METHODS

Real-time air monitoring refers to the use of direct-reading instruments to provide a near-instantaneous readout of chemical concentrations in the air. On February 19, 2025, CTEH personnel developed a SAP to document and quantify the potential release of fugitive emissions from the incident. CTEH has continued to update the SAP and associated monitoring locations based on feedback from PA DEP. The analytes chosen for air monitoring were coordinated with representatives from USEPA and PA DEP for this incident based on the Tier II documentation for the SPS Technologies Facility.

Handheld real-time air monitoring refers to data collected by roaming CTEH personnel using handheld air monitoring instruments. Stationary real-time air monitoring refers to stationary instruments that record air monitoring data approximately every 15 seconds and send the data in real time to a centralized location via radio telemetry. Handheld and Stationary real-time air monitoring were conducted using RAE® Systems by Honeywell MultiRAE Pro and AreaRAE instruments equipped with 10.6 eV photoionization detectors and multiple electrochemical sensors, ChemLogic CLPx portable gas detectors, and Gastec GV-100 pumps equipped with chemical-specific, colorimetric detector tubes. These include volatile organic compounds (VOCs), hydrogen cyanide (HCN), hydrogen sulfide (H₂S), chlorine (Cl₂), carbon

monoxide (CO), sulfuric acid, nitric acid, and flammability as a percentage of the lower explosive limit (%LEL). Additionally, handheld and stationary real-time air monitoring for particulate matter of 2.5 µm diameter or less (PM_{2.5}) was conducted using TSI SidePak AM520 instruments.

Stationary air monitoring equipment is subject to drift events, which are defined as any interference in an instrument's photoionization detector (PID; 10.6 eV) or electrochemical sensor's ability to accurately report the concentration of a chemical in the atmosphere. Common sources of drift include impacts from humidity, temperature changes, and issues with instrument batteries. These drift sources may cause air monitoring equipment to report consistent, low-level detections in the absence of chemicals present in the air.

In total, CTEH has established fifteen stationary real-time air monitoring locations as part of this response. Six air monitoring stations were installed around the perimeter of the impacted facility. The remaining nine monitoring stations were established in the communities surrounding the impacted facility, including schools and parks. These locations include Baederwood Park, the Glenside Youth Athletic Club Baseball Fields, the Noble Train Station, Jenkintown Middle/High School, Salus University, Thomas Williams Park, Curtis Arboretum, Arcadia University, and Glenn Memorial Hall.

3.0 AIR MONITORING RESULTS

Maps of the incident location, real-time air monitoring results, and the locations of stationary real-time air monitoring locations are provided in **Attachment A**. The results of handheld real-time air monitoring are summarized in **Table 1**. The results of stationary real-time air monitoring from the perimeter locations are summarized in **Tables 2 and 3**. The results of the stationary real-time air monitoring from the community locations are summarized in **Tables 4 and 5**. Visual depictions of the stationary real-time air monitoring data from the perimeter locations are provided in **Attachment B**. Visual depictions of the stationary real-time air monitoring data from the community locations are provided in **Attachment C**. A wind rose depicting wind direction and wind speed during this reporting period is provided in **Attachment D**. Meteorological data were acquired from both the PHILADELPHIA NE weather station in Philadelphia, PA, and a Kestrel 6000 cellular weather station located approximately 500 feet north of the facility.

3.1 Handheld Real-Time Air Monitoring Results

Table 1: Handheld Real-Time Perimeter and Expanded Community Air Monitoring Results[†]

| Analyte | Instrument | Number of Readings | Number of Detections | Concentration Range* |
|-----------------|-------------|--------------------|----------------------|-------------------------|
| Cl ₂ | CLPx | 115 | 0 | < 1 ppb |
| | MultiRAE | 28 | 0 | < 0.1 ppm |
| Nitric Acid | Gastec #15L | 176 | 0 | < 0.05 ppm |
| Sulfuric Acid | CLPx | 60 | 0 | < 23.3 ppb |
| | Gastec #35 | 116 | 0 | < 0.2 mg/m ³ |

[†]Note: This is a preliminary data summary, indicating that the data provided have not undergone full quality assurance and quality control (QAQC) process and should be considered preliminary at this time.

*If no detectable concentration was observed, the instrument detection limit is preceded by a “<” symbol.

There were no detections of any analyte evaluated during Handheld Perimeter Air Monitoring or Handheld Community Air Monitoring in this reporting period.

3.2 Stationary Real-Time Perimeter Air Monitoring Results

Table 2. Summary of Stationary Real-Time Perimeter Air Monitoring AreaRAE Results[†]

| Unit | Analyte | Number of Readings | Number of Detections | Concentration Range* |
|------------|------------------|--------------------|----------------------|----------------------|
| Station 01 | CO | 5,758 | 0 | < 1.0 ppm |
| | H ₂ S | 5,758 | 0 | < 0.1 ppm |
| | HCN | 5,758 | 0 | < 1.0 ppm |
| | %LEL | 5,758 | 0 | < 1.0 % |
| | VOCs | 5,757 | 448 | 0.1 - 2.5 ppm |
| Station 03 | CO | 5,809 | 0 | < 1.0 ppm |
| | H ₂ S | 5,809 | 0 | < 0.1 ppm |
| | HCN | 5,809 | 0 | < 1.0 ppm |
| | %LEL | 5,814 | 0 | < 1.0 % |
| | VOCs | 5,811 | 638 | 0.1 - 0.2 ppm |
| Station 04 | CO | 5,840 | 0 | < 1.0 ppm |
| | H ₂ S | 5,840 | 0 | < 0.1 ppm |
| | HCN | 5,840 | 0 | < 1.0 ppm |
| | %LEL | 5,840 | 0 | < 1.0 % |
| | VOCs | 5,840 | 0 | < 0.1 ppm |
| Station 05 | CO | 5,792 | 0 | < 1.0 ppm |
| | H ₂ S | 5,792 | 74 | 0.5 - 0.6 ppm |
| | HCN | 5,792 | 0 | < 1.0 ppm |

| | | | | |
|------------|------------------|-------|-------|---------------|
| | %LEL | 5,792 | 0 | < 1.0 % |
| | VOCs | 5,792 | 33 | 0.1 ppm |
| Station 06 | CO | 5,868 | 0 | < 1.0 ppm |
| | H ₂ S | 5,868 | 0 | < 0.1 ppm |
| | HCN | 5,868 | 0 | < 1.0 ppm |
| | %LEL | 5,868 | 0 | < 1.0 % |
| | VOCs | 5,868 | 0 | < 0.1 ppm |
| Station 07 | CO | 5,836 | 2 | 2.0 - 4.0 ppm |
| | H ₂ S | 5,836 | 0 | < 0.1 ppm |
| | HCN | 5,836 | 0 | < 1.0 ppm |
| | %LEL | 5,836 | 0 | < 1.0 % |
| | VOCs | 5,836 | 1,291 | 0.1 ppm |

†Note: This is a preliminary data summary, indicating that the data provided have not undergone full quality assurance and quality control (QAQC) process and should be considered preliminary at this time. AreaRAE monitoring data contain drift events. Drift is defined as any interference in an instrument's photoionization detector (PID; 10.6 eV) or electrochemical sensor's ability to accurately report the concentration of a chemical in the atmosphere. Humidity, rapid temperature changes, and compromised instrument batteries are examples of common sources of drift.

* If no detection was observed, the instrument detection limit preceded by a "<" symbol is listed; ppm = parts per million

Table 3: Summary of Stationary Real-Time Perimeter Air Monitoring PM_{2.5} Results[†]

| Unit | Instrument | 24-Hour PM _{2.5} NAAQS | Average PM _{2.5} Concentration (mg/m ³) |
|-----------|------------|---------------------------------|--|
| Station 1 | AM520 | 0.035 | 0.014 |
| Station 3 | AM520 | 0.035 | 0.014 |
| Station 4 | AM520 | 0.035 | 0.013 |
| Station 5 | AM520 | 0.035 | 0.012 |
| Station 6 | AM520 | 0.035 | 0.014 |
| Station 7 | AM520 | 0.035 | 0.015 |

†Note: This is a preliminary data summary, indicating that the data provided have not undergone full quality assurance and quality control (QAQC) process and should be considered preliminary at this time.

During stationary real-time perimeter air monitoring, there were no detections of HCN or %LEL at any air monitoring station. Transient low-level detections of CO were observed at Station 7. During this reporting period, there were H₂S detections at one upwind monitoring location (Station 5) between 1543 and 1601 EST on March 3, 2025, during periods of high vehicle traffic. No other H₂S detections were observed at perimeter air monitoring stations located immediately downwind of the facility. There were no elevated average PM_{2.5} concentrations observed in the perimeter monitoring locations during this reporting period.

3.3 Stationary Real-Time Expanded Community Air Monitoring Results

Table 4. Summary of Stationary Real-Time Expanded Community Air Monitoring AreaRAE Results[†]

| Unit | Analyte | Count of Readings | Count of Detections | Range of Detections |
|------------|------------------|-------------------|---------------------|---------------------|
| Station 02 | CO | 4,901 | 2 | 3.0 - 20.0 ppm |
| | H ₂ S | 4,901 | 0 | < 0.1 ppm |
| | HCN | 4,901 | 0 | < 1.0 ppm |
| | LEL | 4,901 | 0 | < 1.0 % |
| | VOCs | 4,901 | 0 | < 0.1 ppm |
| Station 08 | CO | 4,797 | 0 | < 1.0 ppm |
| | H ₂ S | 4,797 | 0 | < 0.1 ppm |
| | HCN | 4,797 | 0 | < 1.0 ppm |
| | LEL | 4,797 | 0 | < 1.0 % |
| | VOCs | 4,797 | 0 | < 0.1 ppm |
| Station 09 | CO | 5,174 | 0 | < 1.0 ppm |
| | H ₂ S | 5,174 | 0 | < 0.1 ppm |
| | HCN | 5,174 | 0 | < 1.0 ppm |
| | LEL | 5,174 | 0 | < 1.0 % |
| | VOCs | 5,174 | 0 | < 0.1 ppm |
| Station 10 | CO | 4,989 | 0 | < 1.0 ppm |
| | H ₂ S | 4,989 | 0 | < 0.1 ppm |
| | HCN | 4,989 | 0 | < 1.0 ppm |
| | LEL | 4,989 | 0 | < 1.0 % |
| | VOCs | 4,989 | 0 | < 0.1 ppm |
| Station 11 | CO | 5,109 | 0 | < 1.0 ppm |
| | H ₂ S | 5,109 | 0 | < 0.1 ppm |
| | HCN | 5,109 | 0 | < 1.0 ppm |
| | LEL | 5,109 | 0 | < 1.0 % |
| | VOCs | 5,109 | 1,655 | 0.1 ppm |
| Station 12 | CO | 5,257 | 0 | < 1.0 ppm |
| | H ₂ S | 5,257 | 0 | < 0.1 ppm |
| | HCN | 5,257 | 0 | < 1.0 ppm |
| | LEL | 5,257 | 436 | 1.0 - 3.0 % |
| | VOCs | 5,257 | 1,481 | 0.1 - 0.2 ppm |
| Station 13 | CO | 5,322 | 0 | < 1.0 ppm |
| | H ₂ S | 5,322 | 0 | < 0.1 ppm |
| | HCN | 5,322 | 0 | < 1.0 ppm |
| | LEL | 5,322 | 0 | < 1.0 % |

| | | | | |
|------------|------------------|-------|-------|-----------|
| Station 14 | VOCs | 5,322 | 1 | 0.1 ppm |
| | CO | 4,846 | 0 | < 1.0 ppm |
| | H ₂ S | 4,846 | 0 | < 0.1 ppm |
| | HCN | 4,846 | 0 | < 1.0 ppm |
| | LEL | 4,846 | 0 | < 1.0 % |
| Station 15 | VOCs | 4,846 | 766 | 0.1 ppm |
| | CO | 4,938 | 0 | < 1.0 ppm |
| | H ₂ S | 4,938 | 0 | < 0.1 ppm |
| | HCN | 4,938 | 0 | < 1.0 ppm |
| | LEL | 4,938 | 0 | < 1.0 % |
| | VOCs | 4,938 | 1,402 | 0.1 ppm |

†Note: This is a preliminary data summary, indicating that the data provided have not undergone full quality assurance and quality control (QAQC) process and should be considered preliminary at this time. AreaRAE monitoring data contain drift events. Drift is defined as any interference in an instrument's photoionization detector (PID; 10.6 eV) or electrochemical sensor's ability to accurately report the concentration of a chemical in the atmosphere. Humidity, rapid temperature changes, and compromised instrument batteries are examples of common sources of drift.

* If no detection was observed, the instrument detection limit preceded by a "<" symbol is listed; ppm = parts per million

Table 5: Summary of Stationary Real-Time Expanded Community Air Monitoring PM_{2.5} Results †

| Unit | Instrument | 24-Hour PM _{2.5} NAAQS | Average PM _{2.5} Concentration (mg/m ³) |
|------------|------------|---------------------------------|--|
| Station 2 | AM 520 | 0.035 | 0.013 |
| Station 8 | AM520 | 0.035 | 0.014 |
| Station 9 | AM520 | 0.035 | 0.014 |
| Station 10 | AM520 | 0.035 | 0.014 |
| Station 11 | AM520 | 0.035 | 0.014 |
| Station 12 | AM520 | 0.035 | 0.015 |
| Station 13 | AM520 | 0.035 | 0.014 |
| Station 14 | AM520 | 0.035 | 0.014 |
| Station 15 | AM520 | 0.035 | 0.014 |

†Note: This is a preliminary data summary, indicating that the data provided have not undergone full quality assurance and quality control (QAQC) process and should be considered preliminary at this time.

Stationary real-time monitoring at nine locations in communities surrounding the facility indicated no detections of H₂S or HCN. Transient low-level detections of CO were observed at Station 2. Low-level detections of %LEL without a concurrent increase in VOCs were observed at Station 12. Confirmation readings with a secondary instrument indicated that these detections may have been due to sensor drift. There were no elevated average PM_{2.5} concentrations observed in the community monitoring locations during this reporting period.

3.4 Analyte-Specific Action Levels

As part of the SAP, air monitoring action levels were identified for air monitoring detections for which on-site incident management members should be notified. The action levels identified in the SAP are provided in **Table 6**.

Table 6: Analyte-Specific Action Levels Resulting in Stakeholder Notification

| Concentration Durations | | Action Levels | |
|-------------------------|-----------|--------------------------------------|--|
| | | Sustained for 5 Minutes | Sustained for 30 Seconds |
| Analyte | CAS | Protective Action Criteria 1 (PAC-1) | ½ Protective Action Criteria 2 (½ PAC-2) |
| Sulfuric Acid | 7664-93-9 | 0.05 ppm | 1.1 ppm |
| Nitric Acid | 7697-37-2 | 0.16 ppm | 12 ppm |
| Hydrogen Cyanide | 74-90-8 | 2 ppm | 3.5 ppm |
| Hydrogen Sulfide | 7783-06-4 | 0.51 ppm | 13.5 ppm |
| Chlorine | 7782-50-5 | 0.5 ppm | 1.0 ppm |

If any analyte exceeds the PAC-1 for 5 minutes and is confirmed with a secondary instrument or if any analyte exceeds ½ PAC-2 for 30 seconds, the CTEH monitoring personnel will immediately contact the CTEH Project Technical Director via a telephone call. The CTEH Project Technical Director will then notify a designated group of SPS representatives via group text message and individual phone calls for appropriate stakeholder notifications and emergency management decision-making.

During this reporting period, there were no action level exceedances of any analyte evaluated requiring notification of on-site incident management.

4.0 METEOROLOGICAL CONDITIONS

Attachment D contains wind roses depicting wind speed and direction from station PHILADELPHIA NE, approximately 6.89 miles from the site, and a Kestrel 6000 cellular monitoring station located approximately 500 feet north of the facility.



Attachment A

Maps




SPS Technologies Fire


Incident Location
Abington Township, PA | Montgomery
County
PROJ-052216

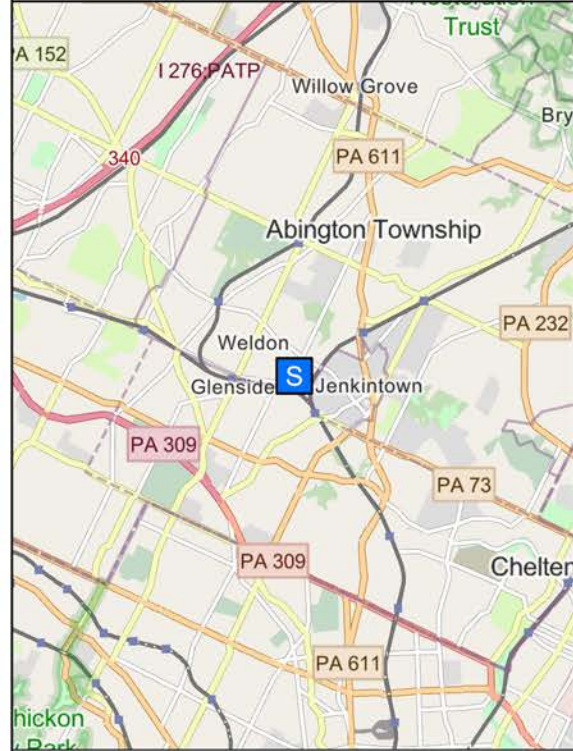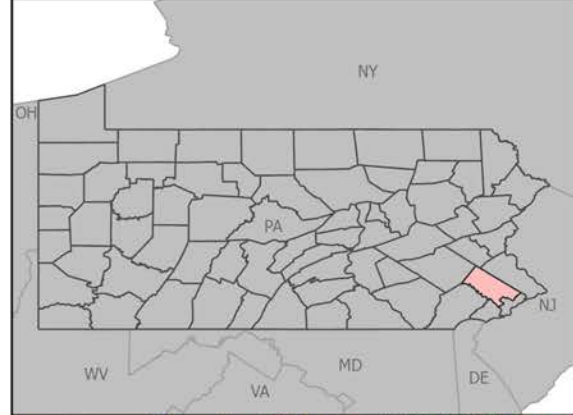



Updated At: 2/20/2025 4:59 PM

Projection: NAD 1983 2011 StatePlane Pennsylvania South
FIPS 3702

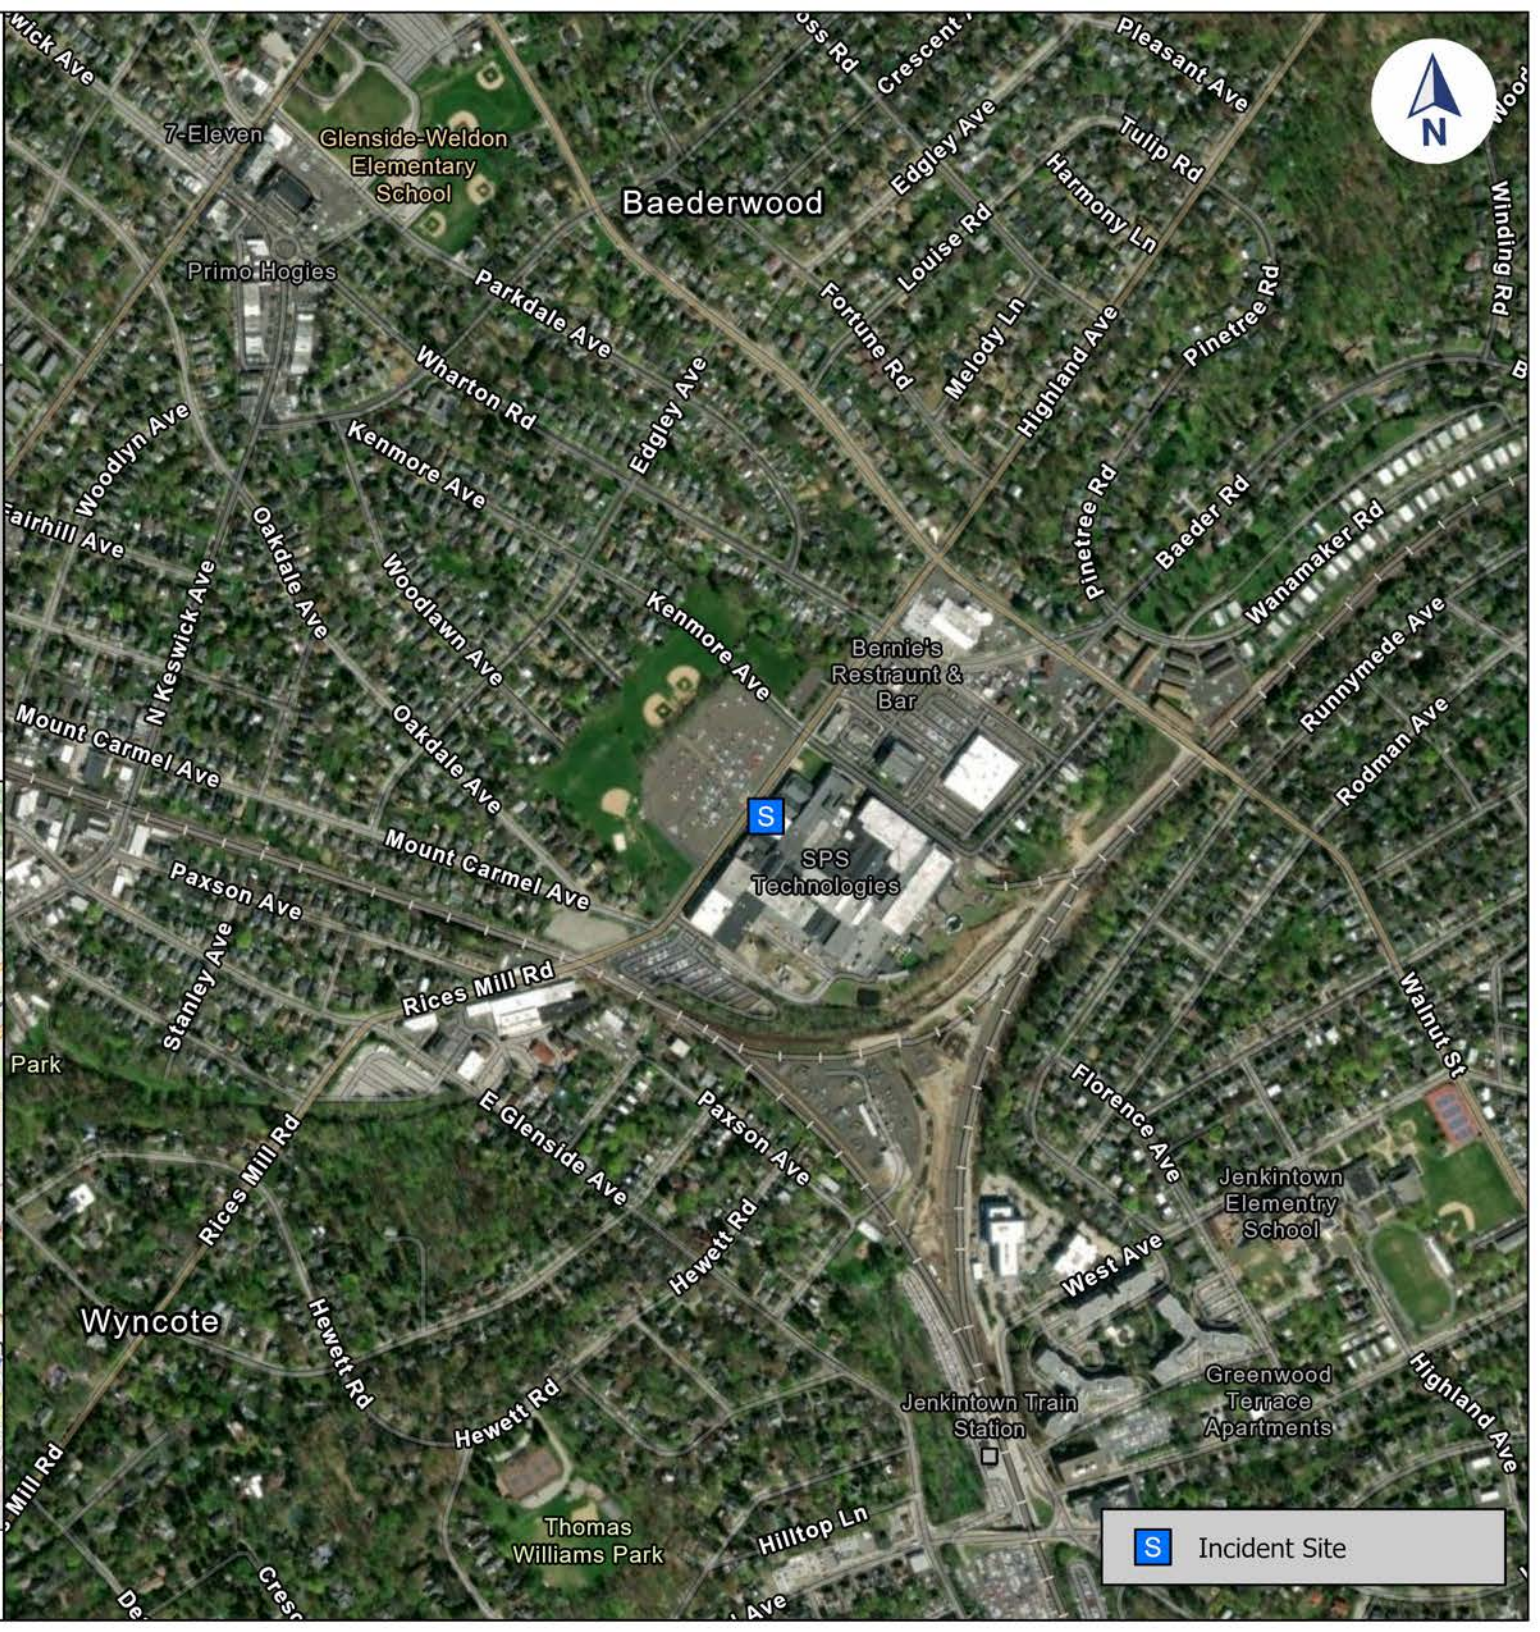

 Incident Site

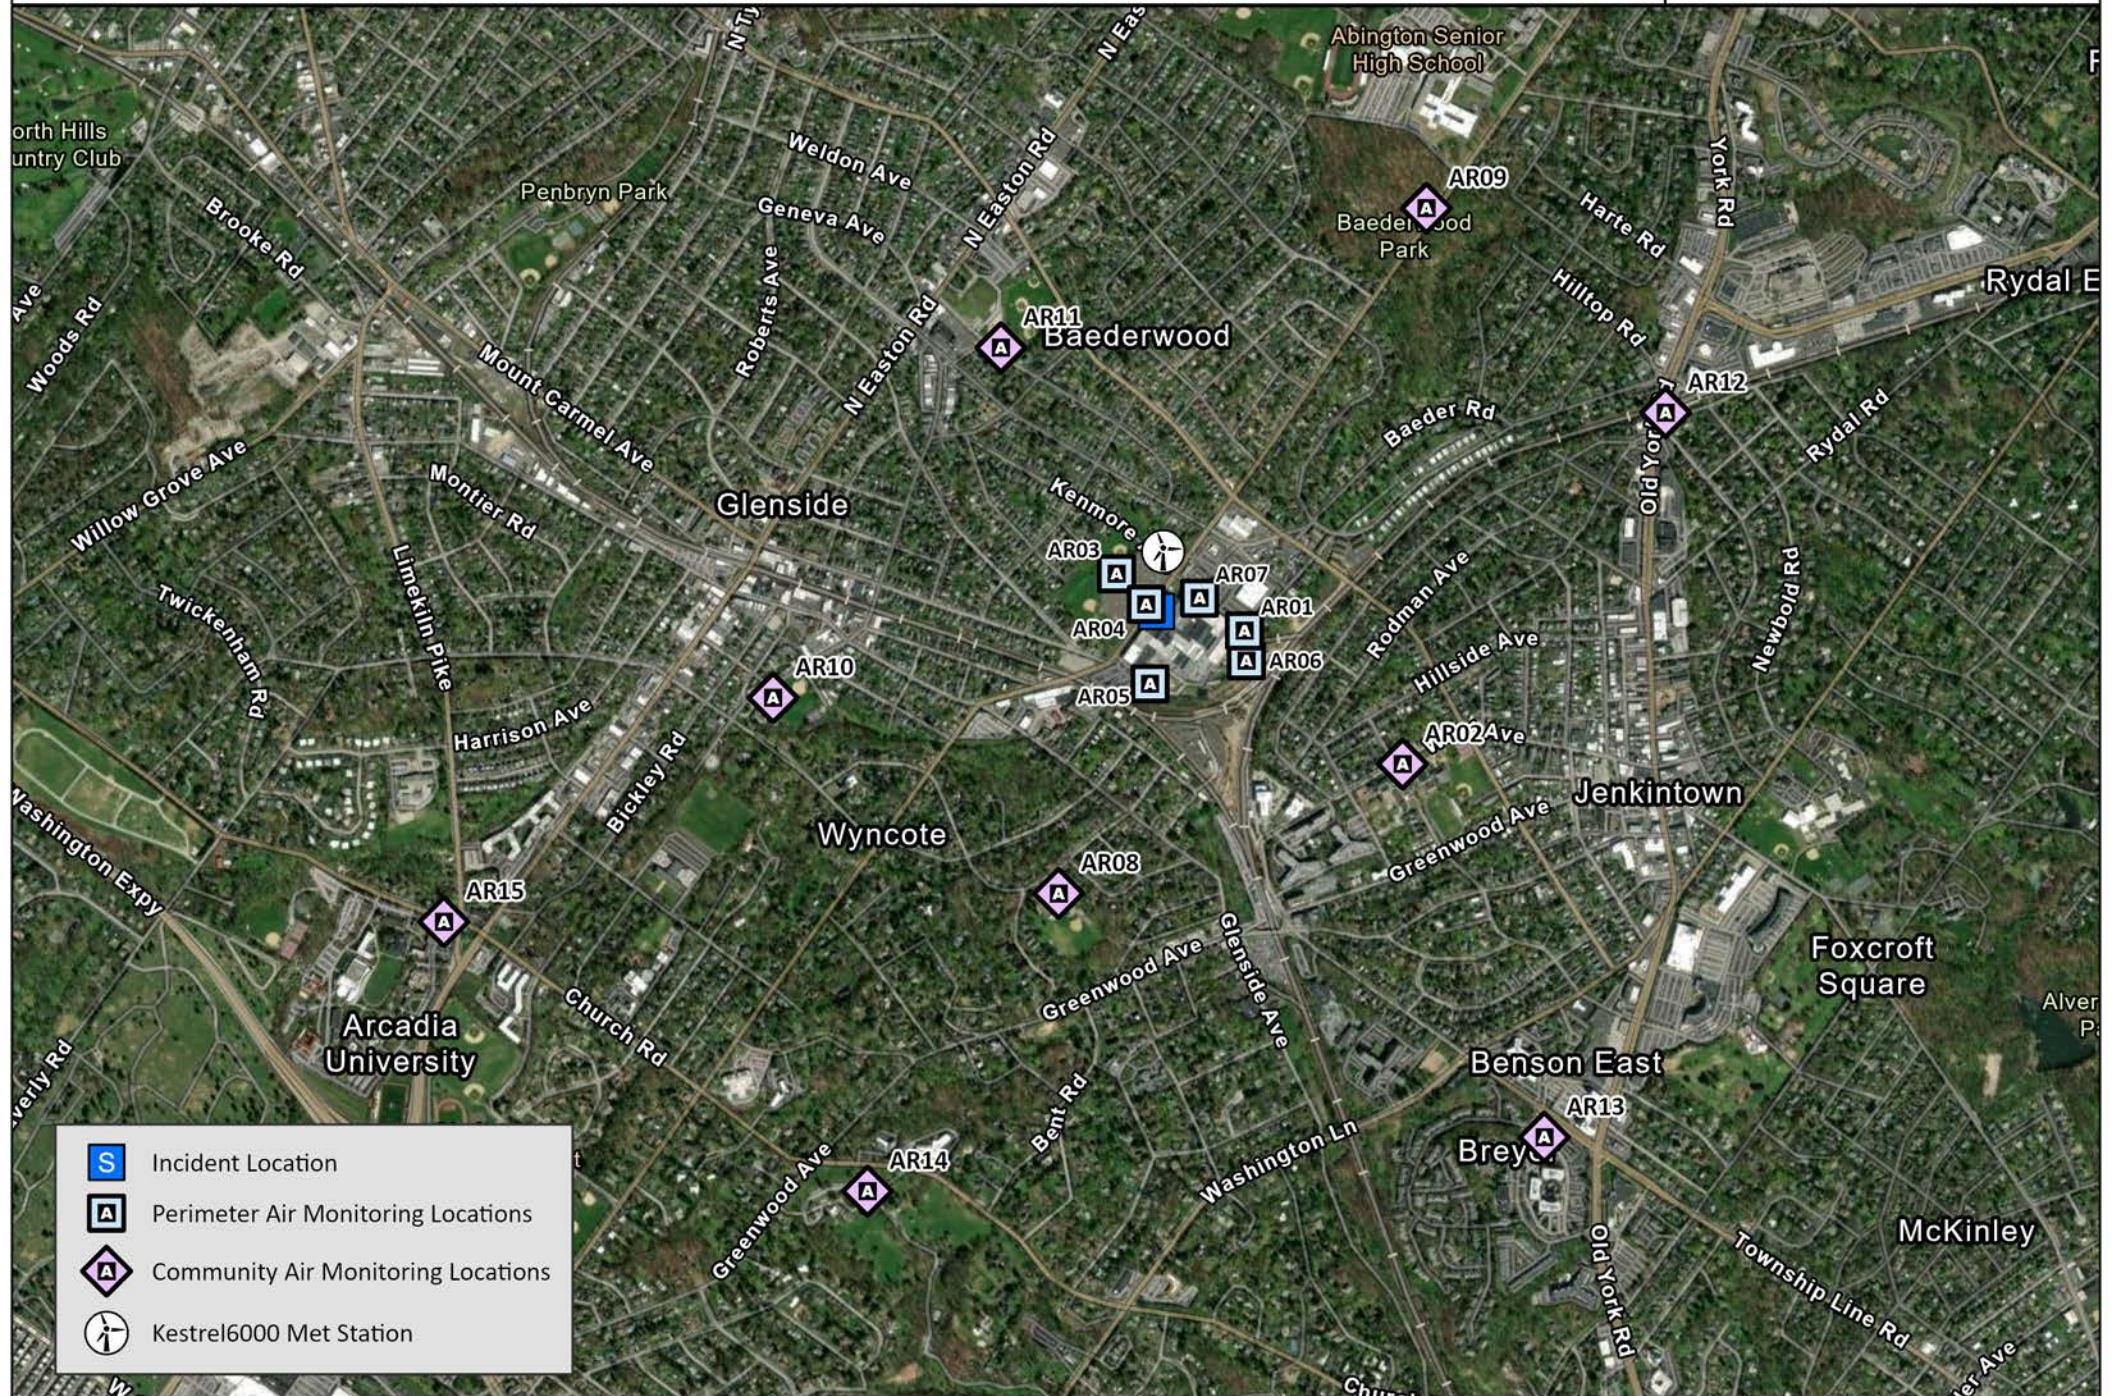

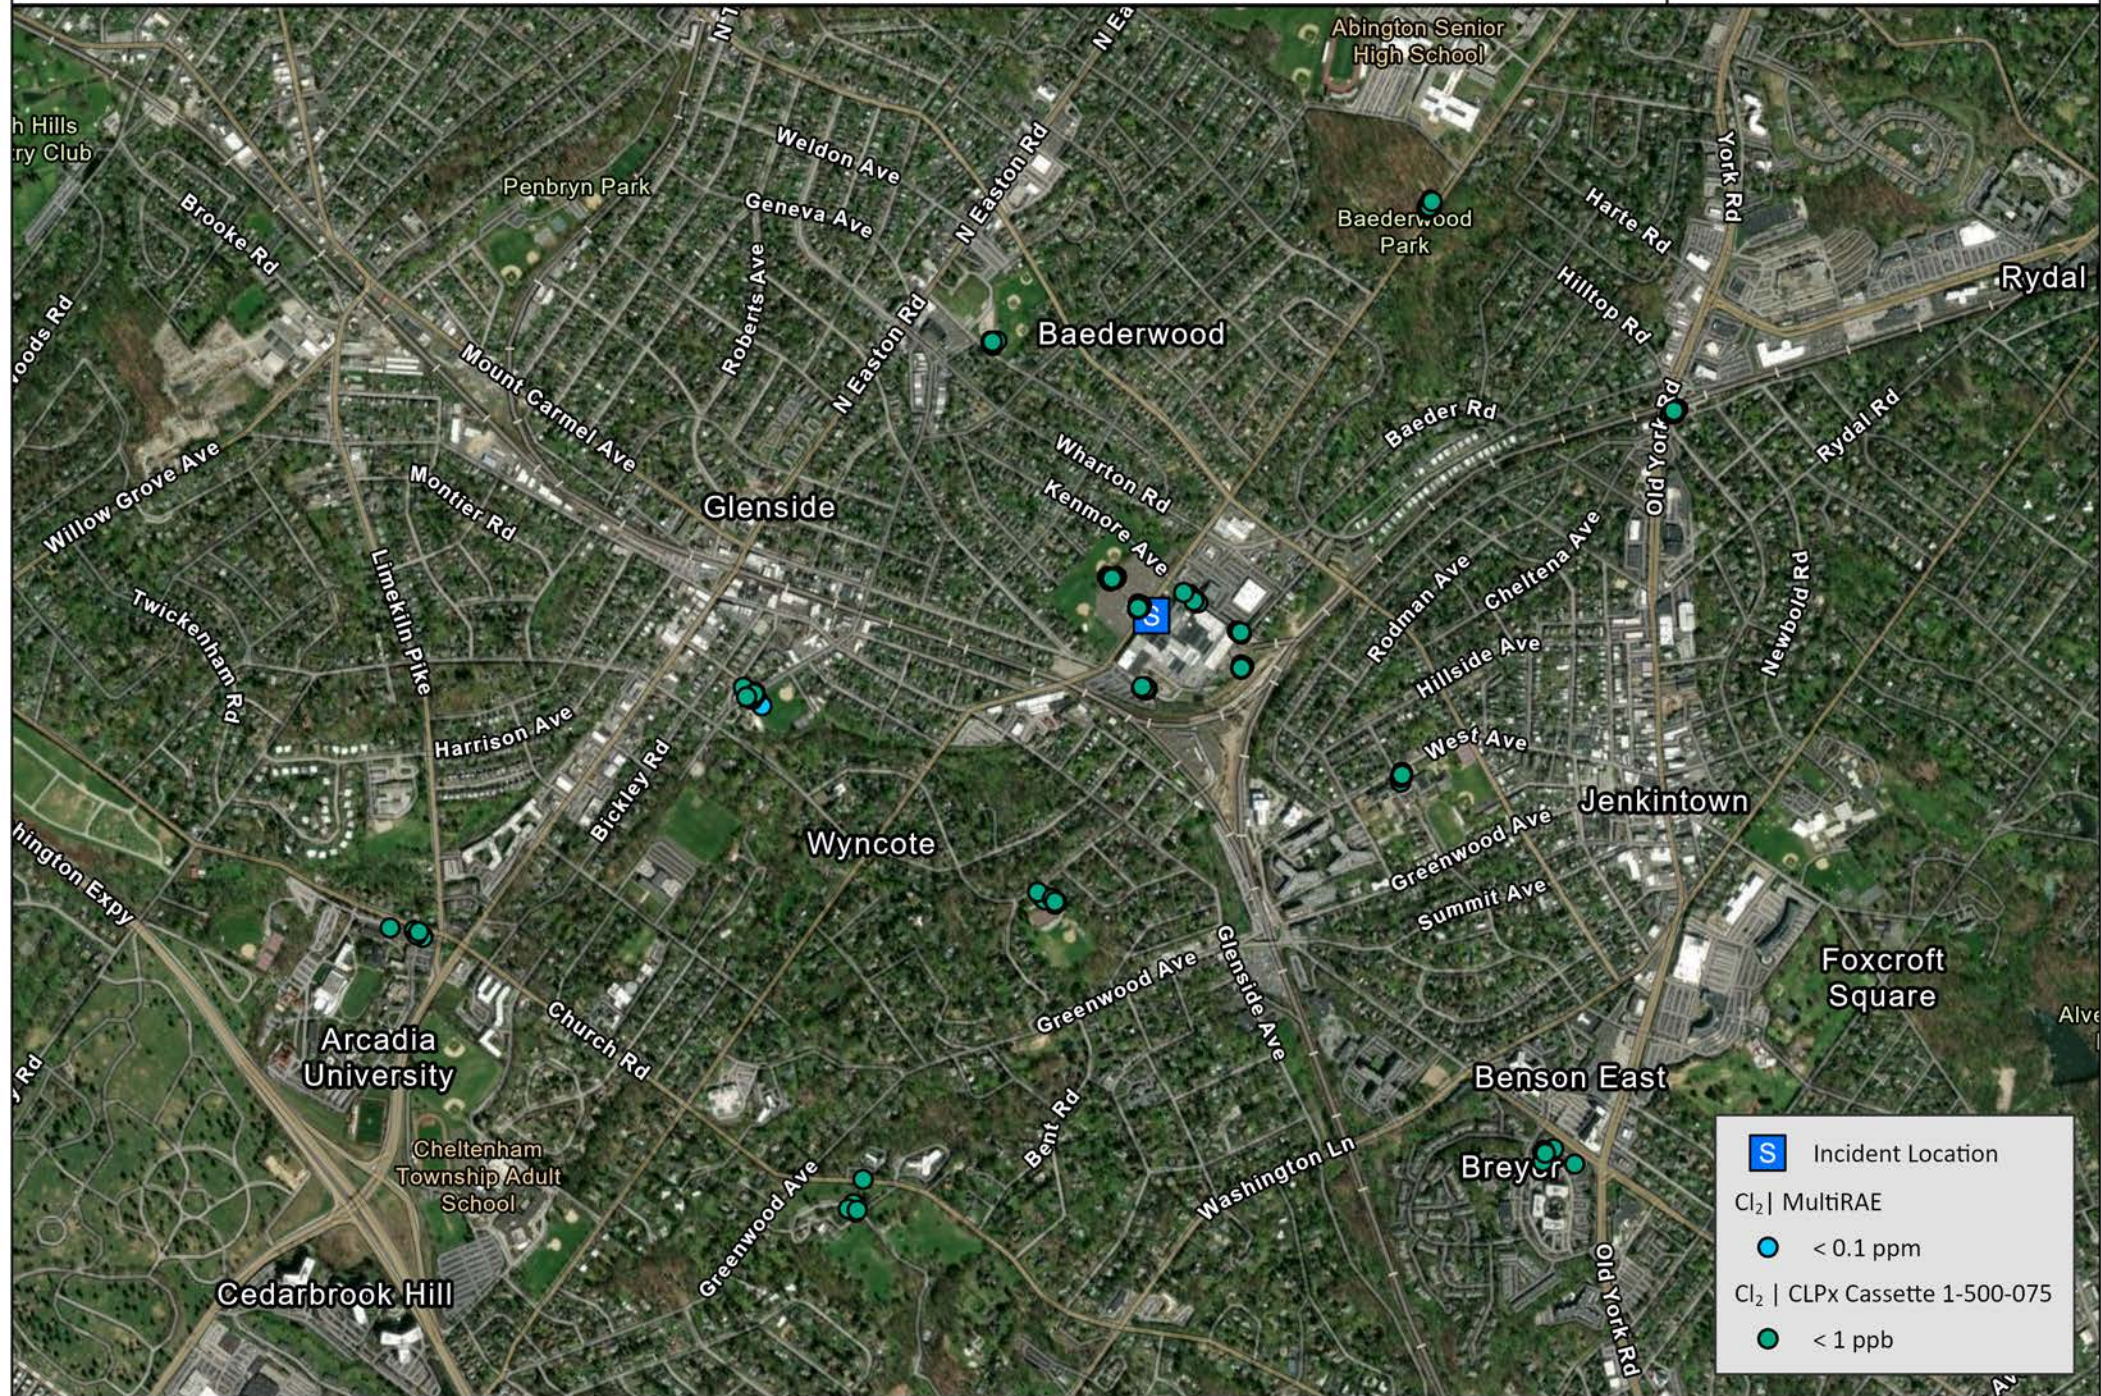


S Incident Location

Cl₂ | MultiRAE


- < 0.1 ppm
- < 1 ppb

Cl₂ | CLPx Cassette 1-500-075

- < 1 ppb

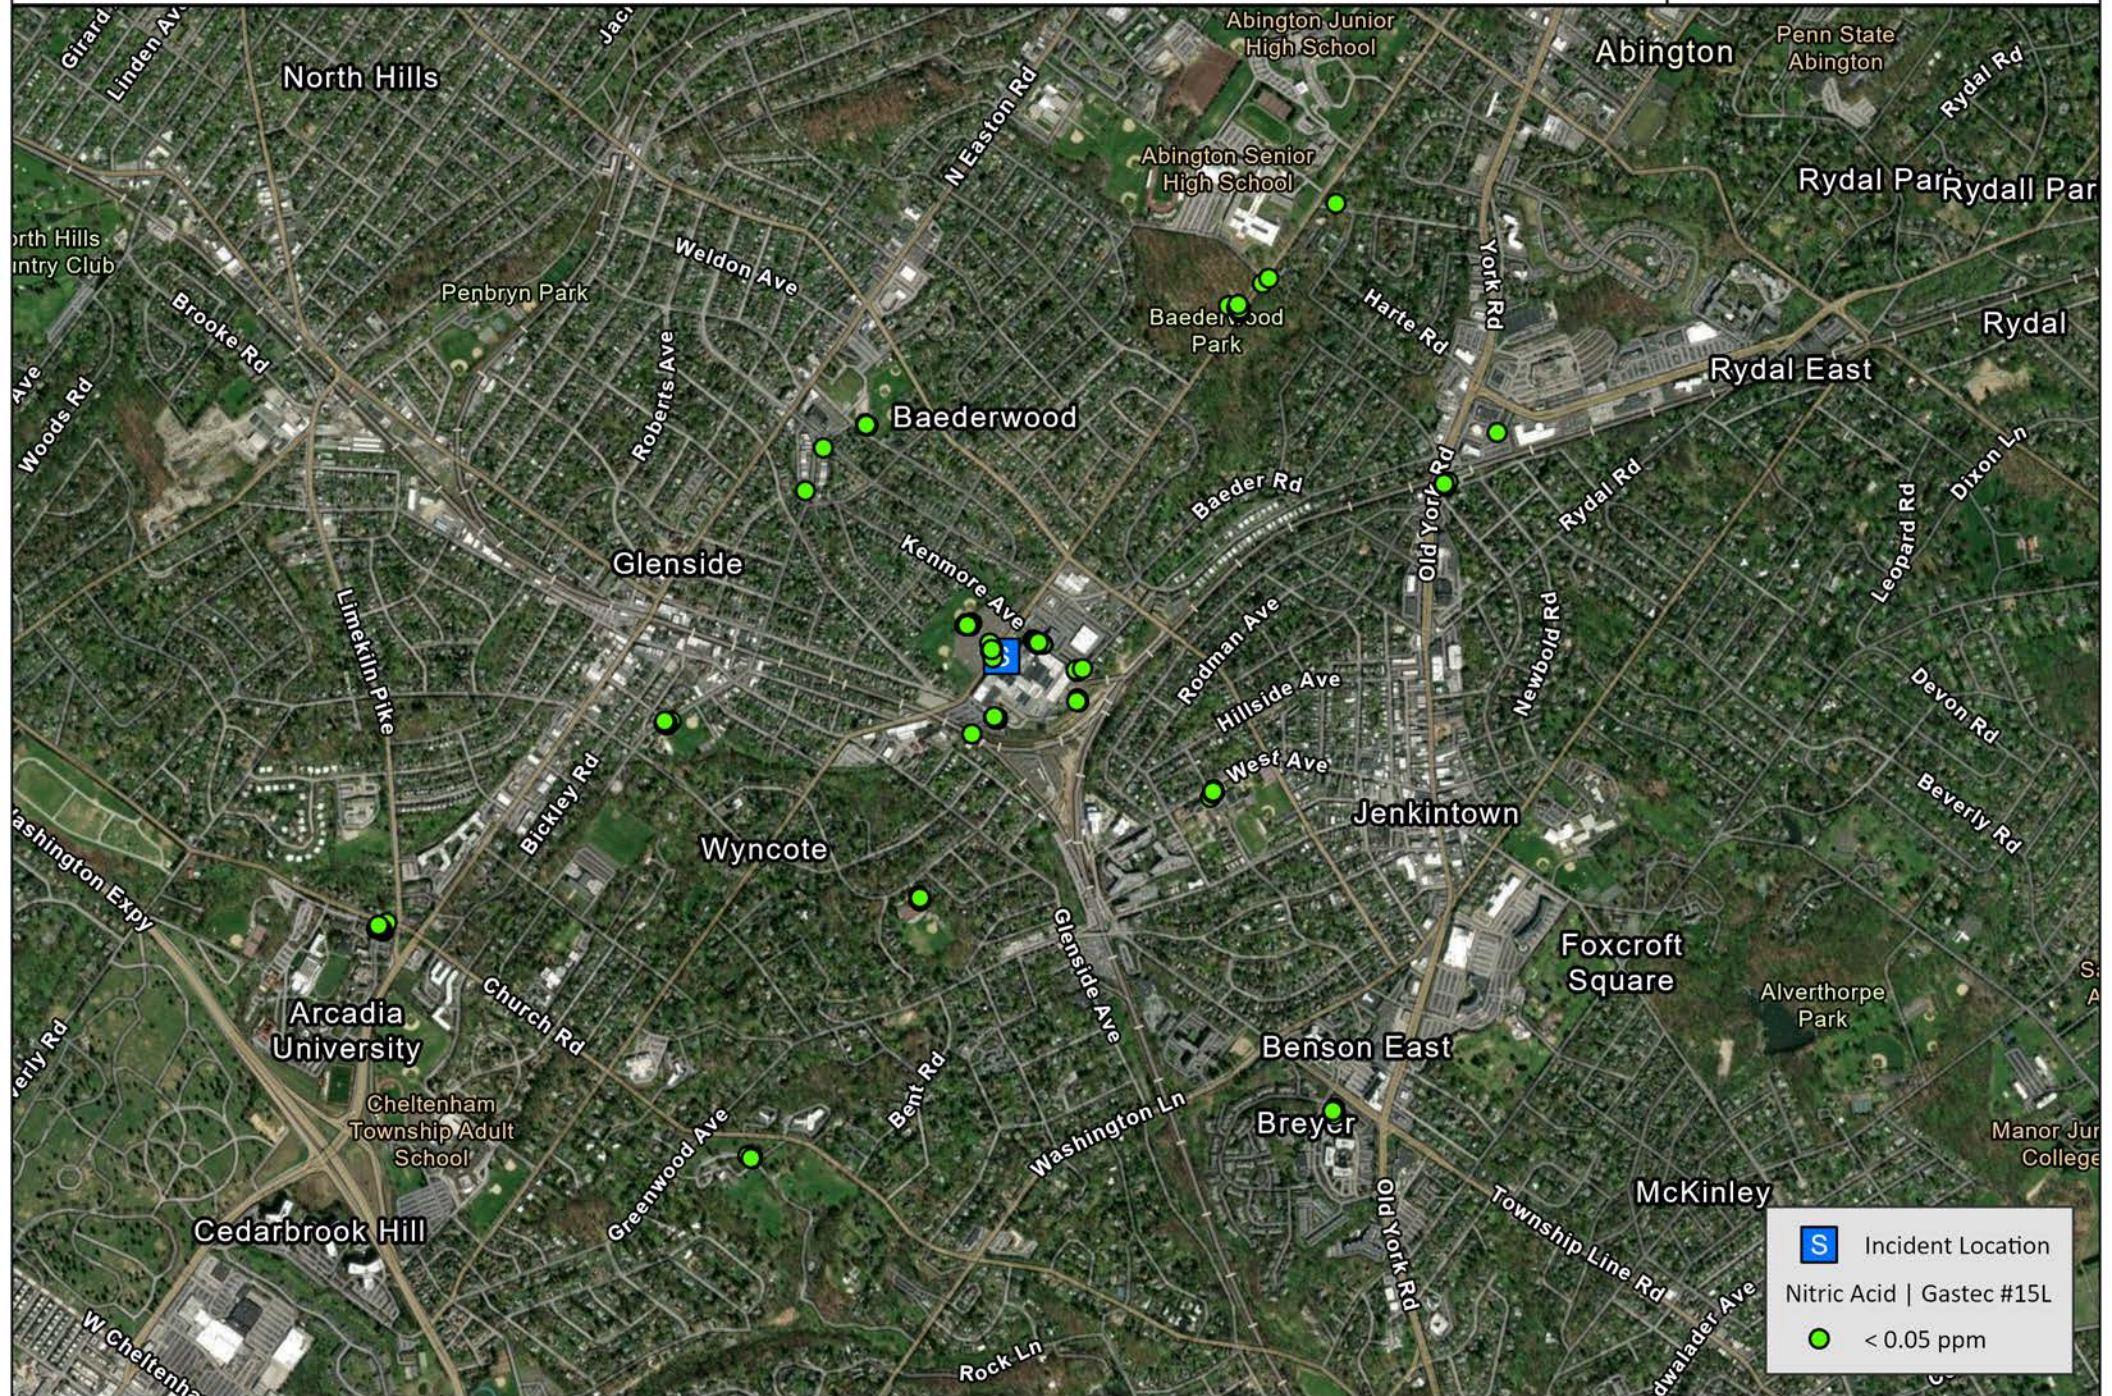

Incident Location
Nitric Acid | Gastec #15L
 < 0.05 ppm

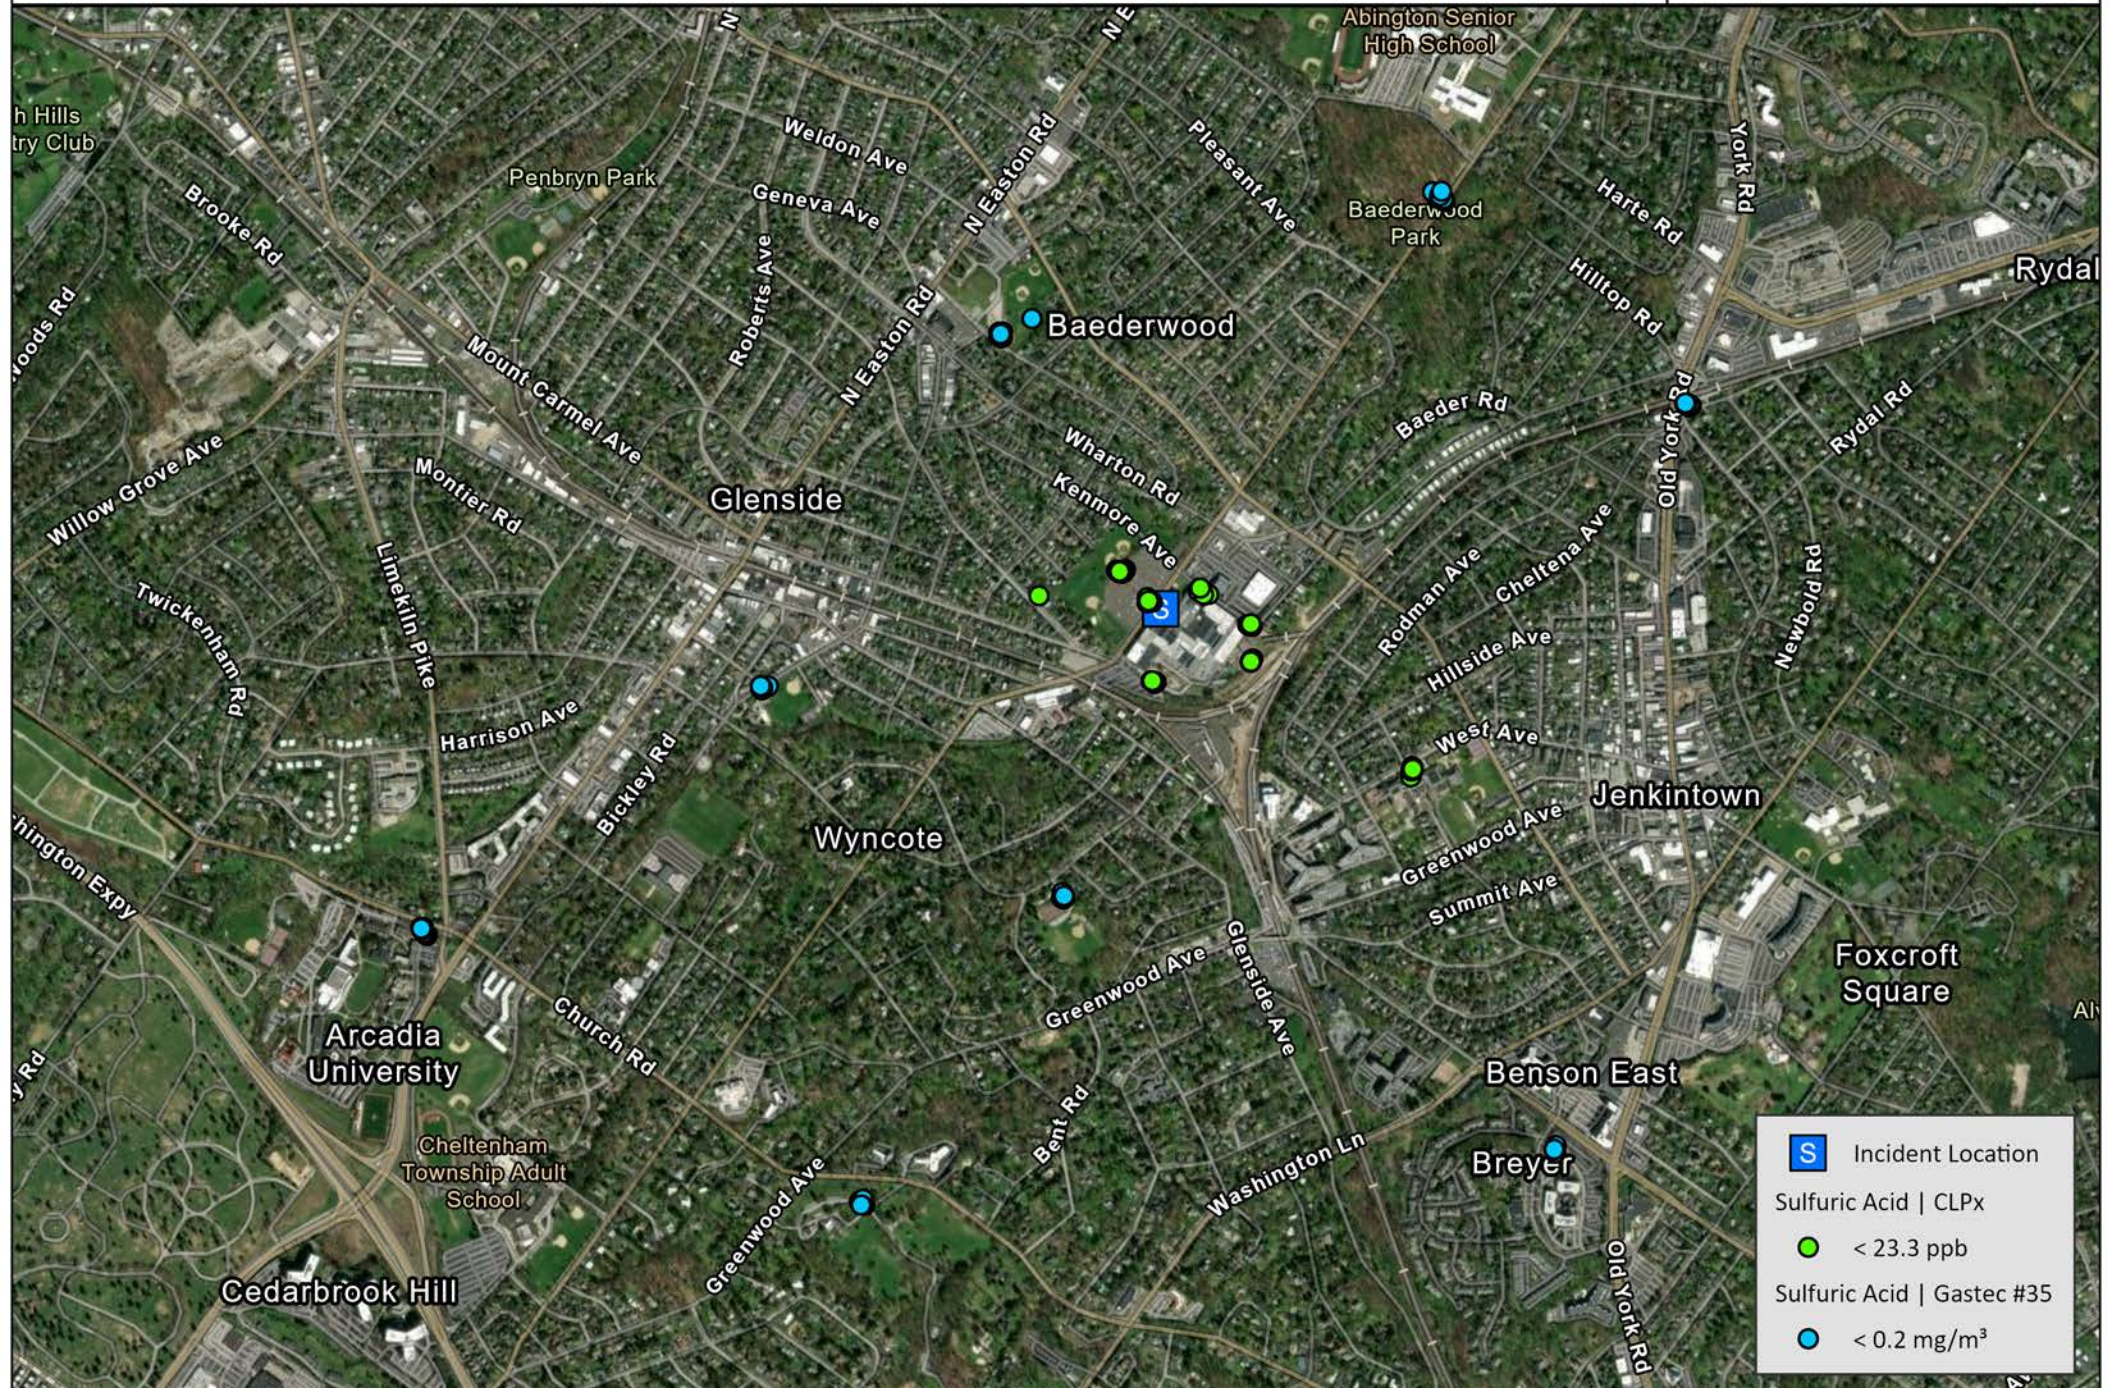

S Incident Location

Sulfuric Acid | CLPx

● < 23.3 ppb

Sulfuric Acid | Gastec #35

● < 0.2 mg/m³


Attachment B

Stationary Real-Time Perimeter Monitoring Graphs

Preliminary Fixed Station Real-time Air Monitoring Readings

PROJ-052216 | SPS Technologies Fire | Abington Township, PA


3/4/2025 4:41:35 AM to 3/5/2025 4:57:00 AM | **Analyte: CO (ppm)**

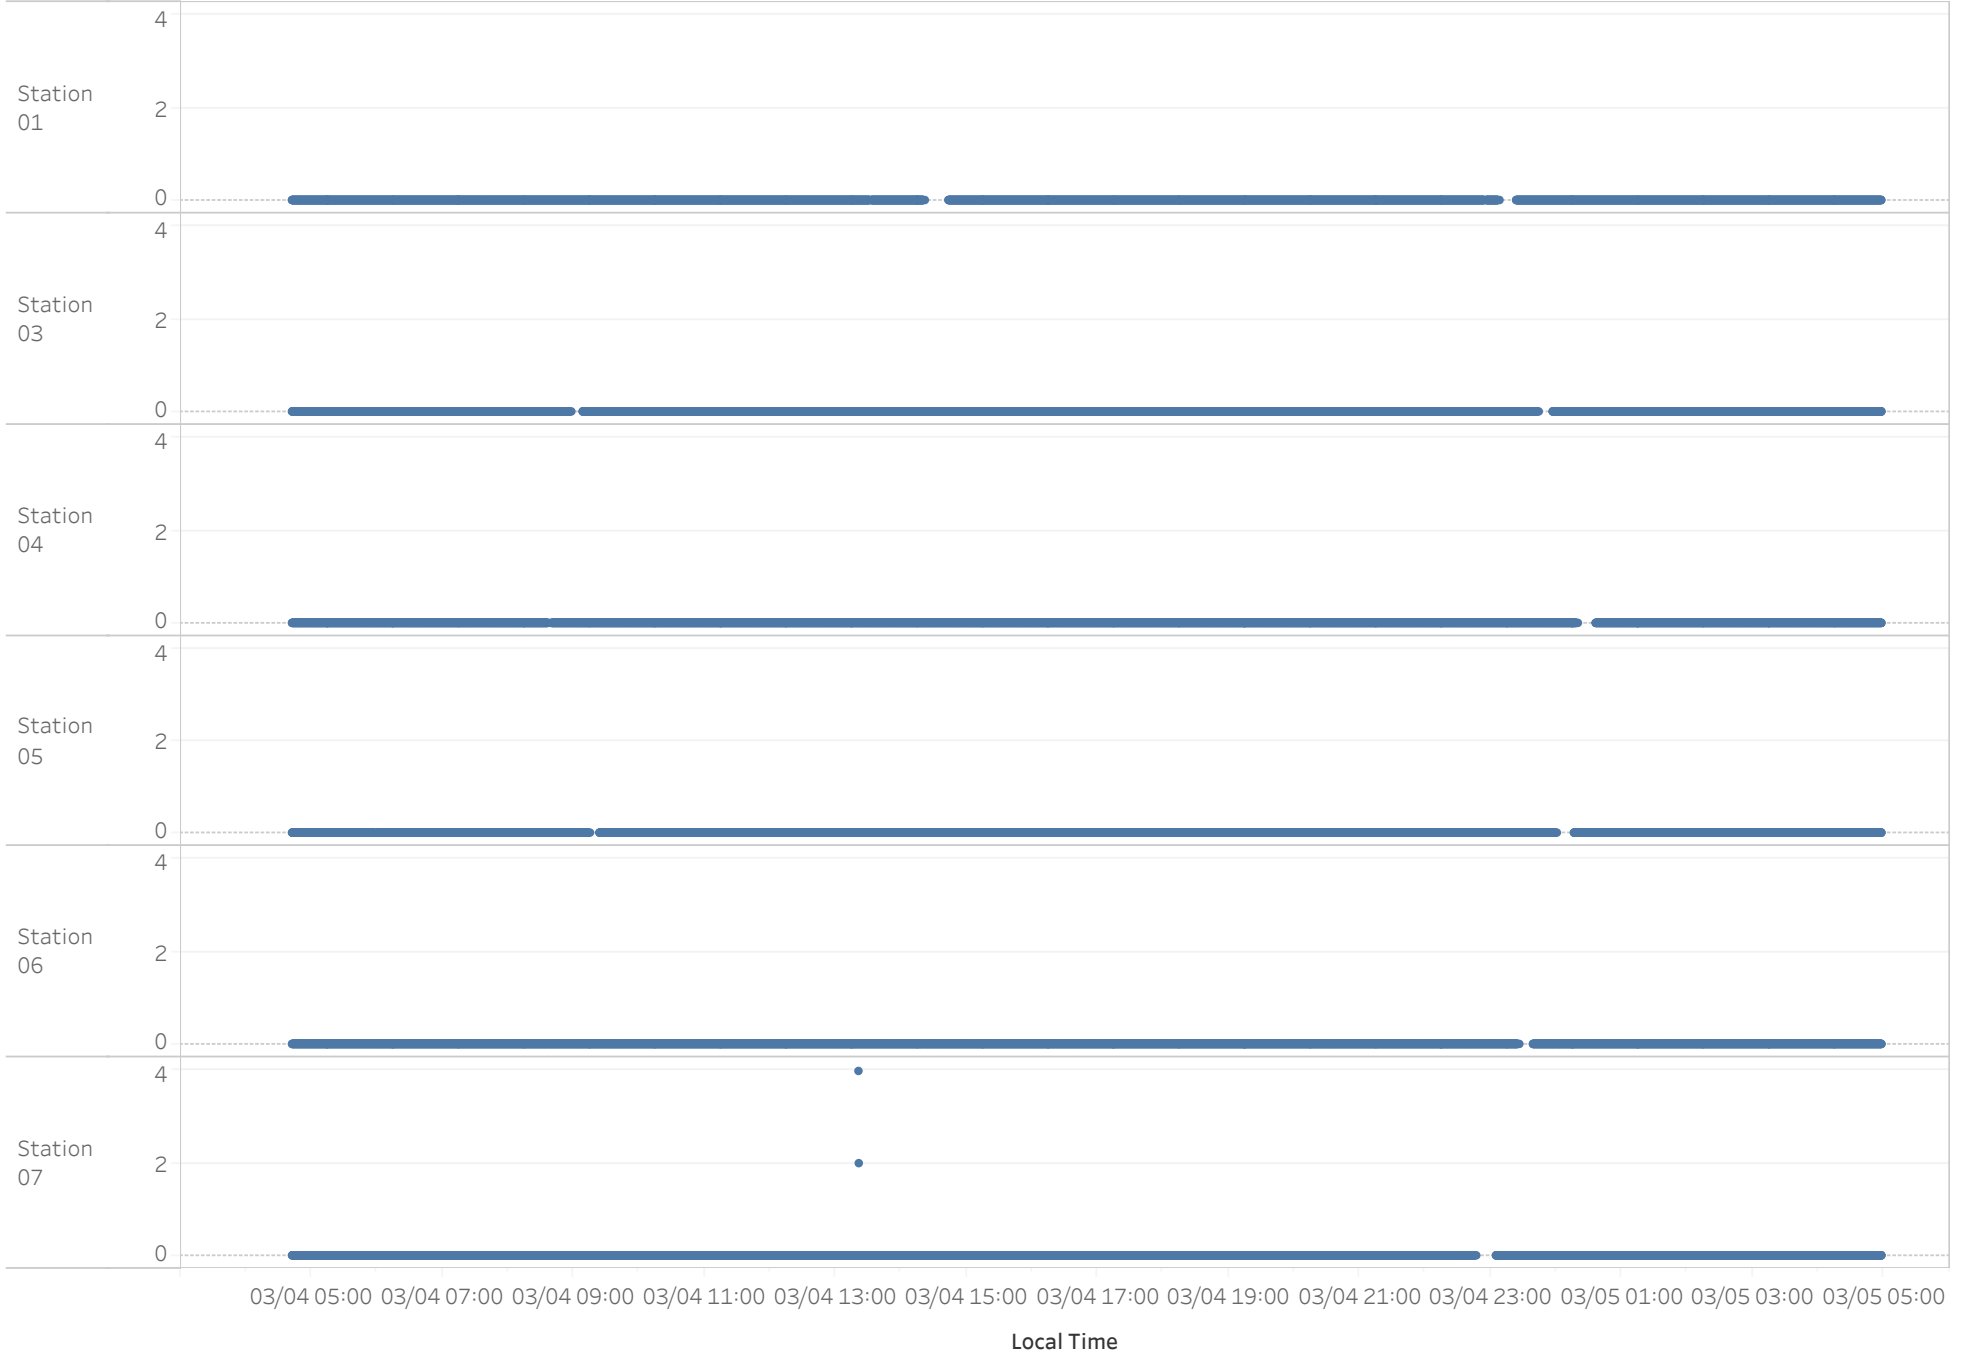

Preliminary Fixed Station Real-time Air Monitoring Readings

PROJ-052216 | SPS Technologies Fire | Abington Township, PA


3/4/2025 4:41:35 AM to 3/5/2025 4:57:00 AM | **Analyte: H2S (ppm)**

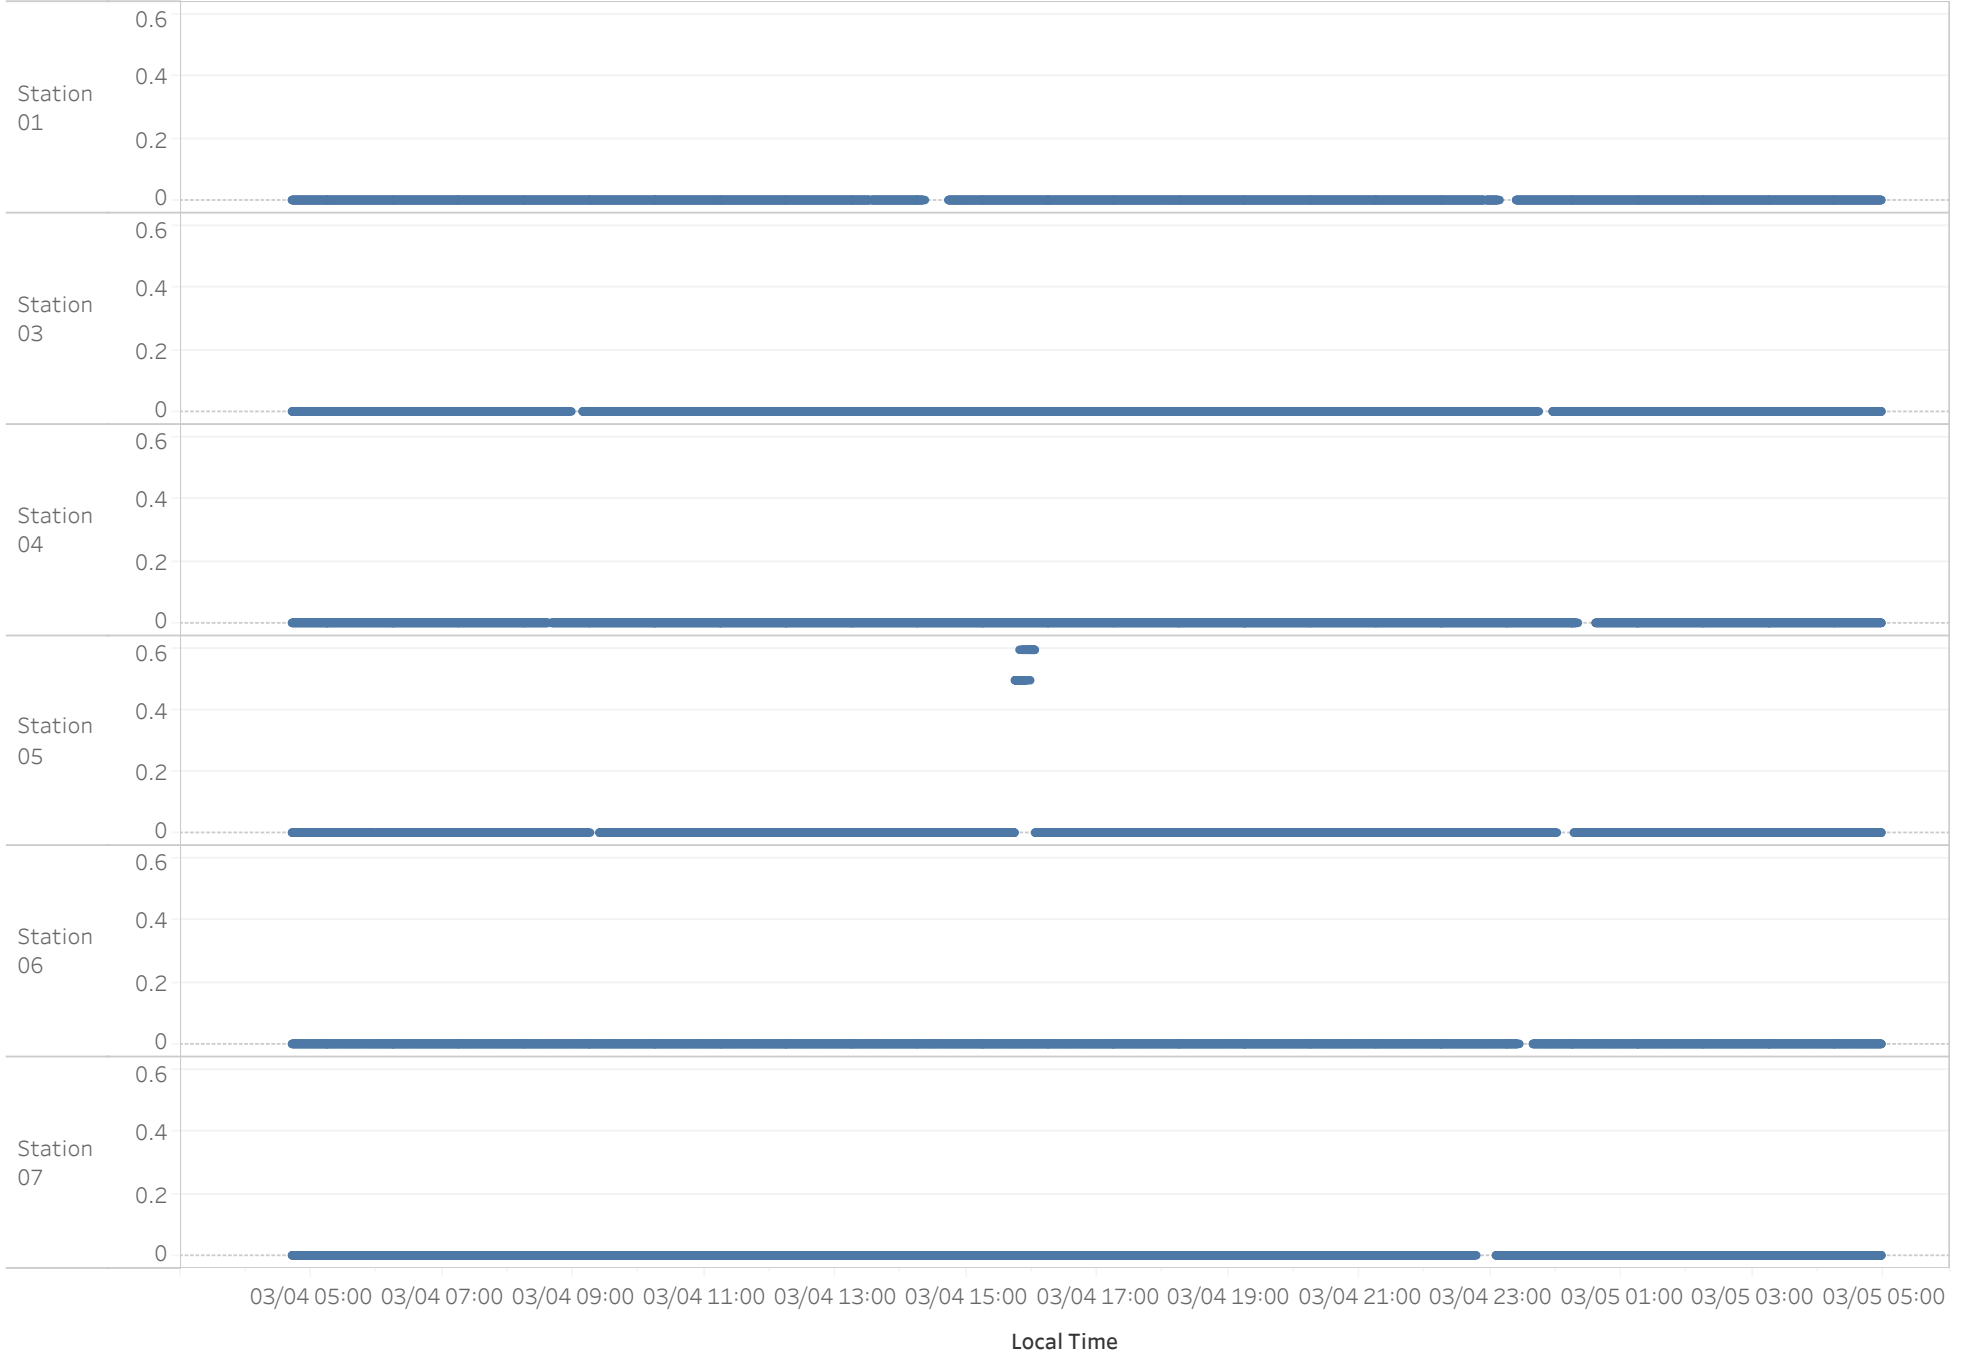

Preliminary Fixed Station Real-time Air Monitoring Readings

PROJ-052216 | SPS Technologies Fire | Abington Township, PA

3/4/2025 4:41:35 AM to 3/5/2025 4:57:00 AM | Analyte: HCN (ppm)

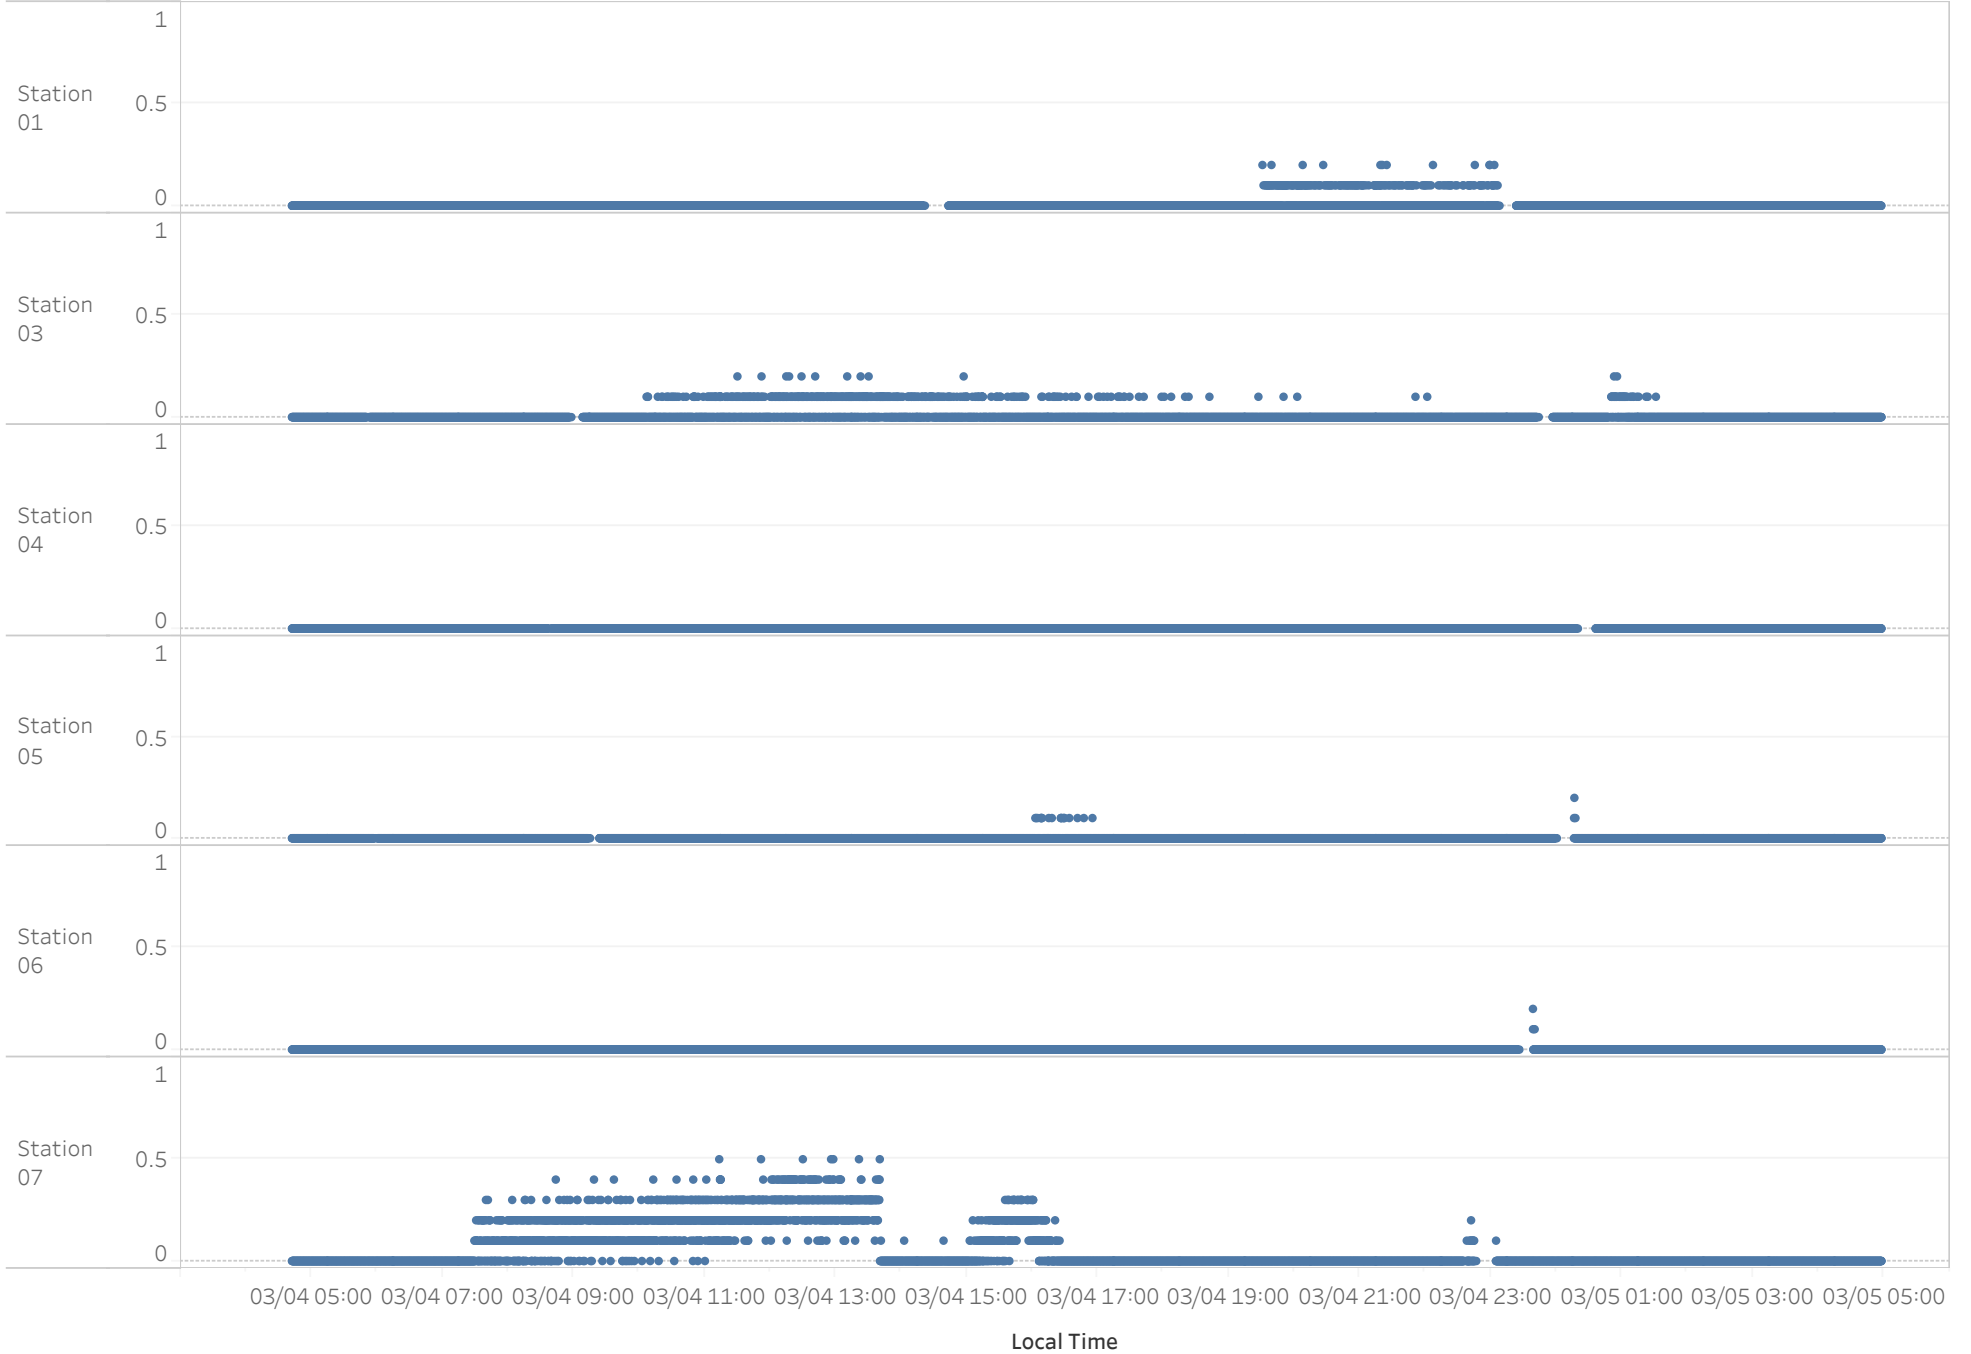

Preliminary Fixed Station Real-time Air Monitoring Readings

PROJ-052216 | SPS Technologies Fire | Abington Township, PA


3/4/2025 4:41:35 AM to 3/5/2025 4:57:00 AM | **Analyte: LEL (%)**



Preliminary Fixed Station Real-time Air Monitoring Readings

PROJ-052216 | SPS Technologies Fire | Abington Township, PA


3/4/2025 4:41:35 AM to 3/5/2025 4:57:00 AM | Analyte: VOCs (ppm)

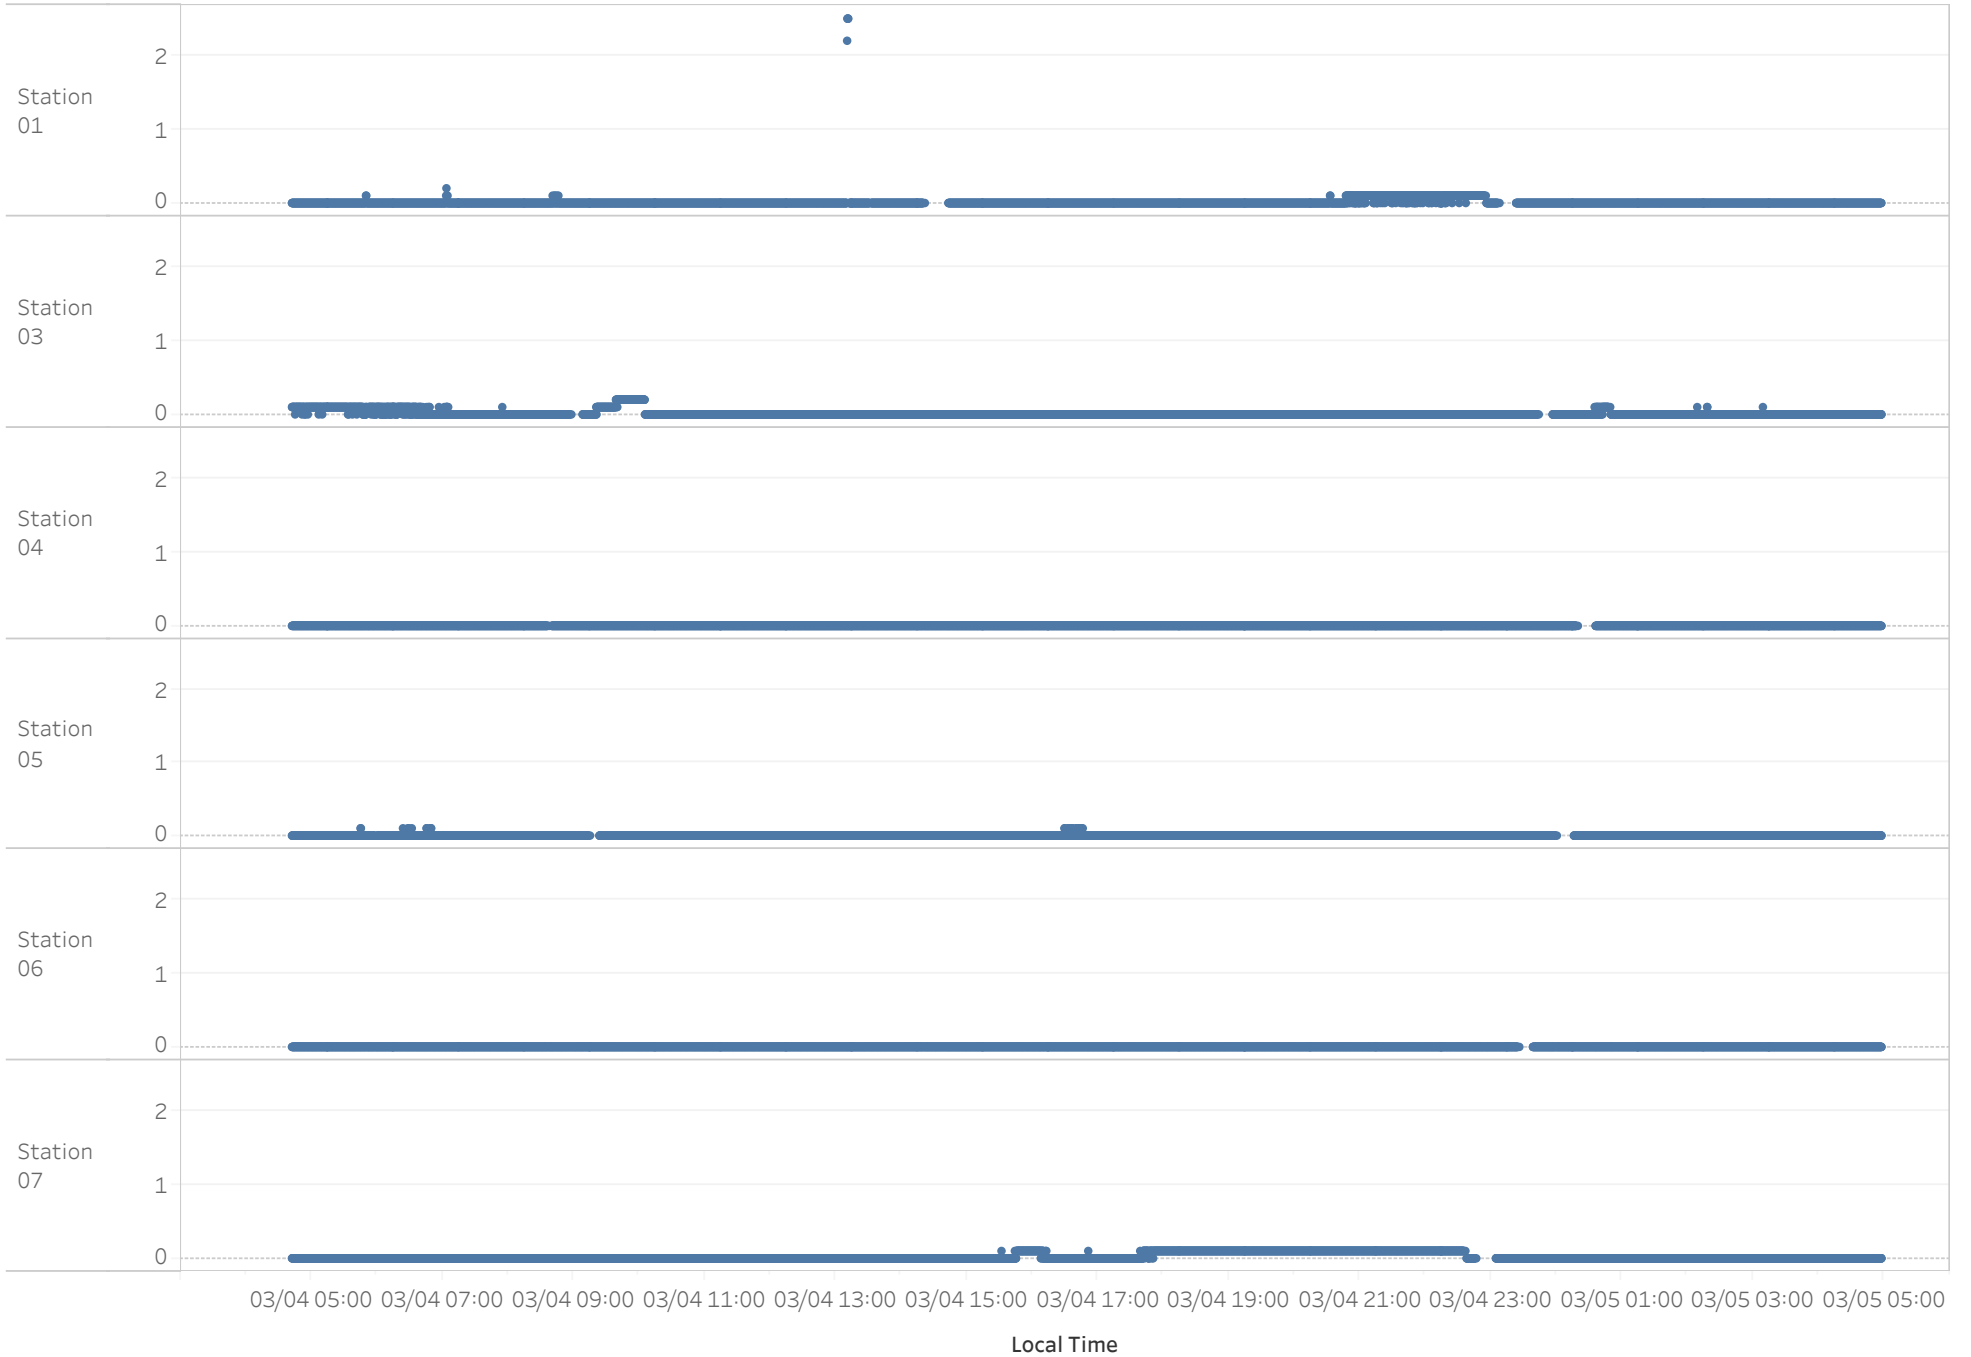

PROJ-052216 | PM2.5 Graph

SPS Technologies Fire | Abington Township, PA

03/04 05:07 to 03/05 05:02

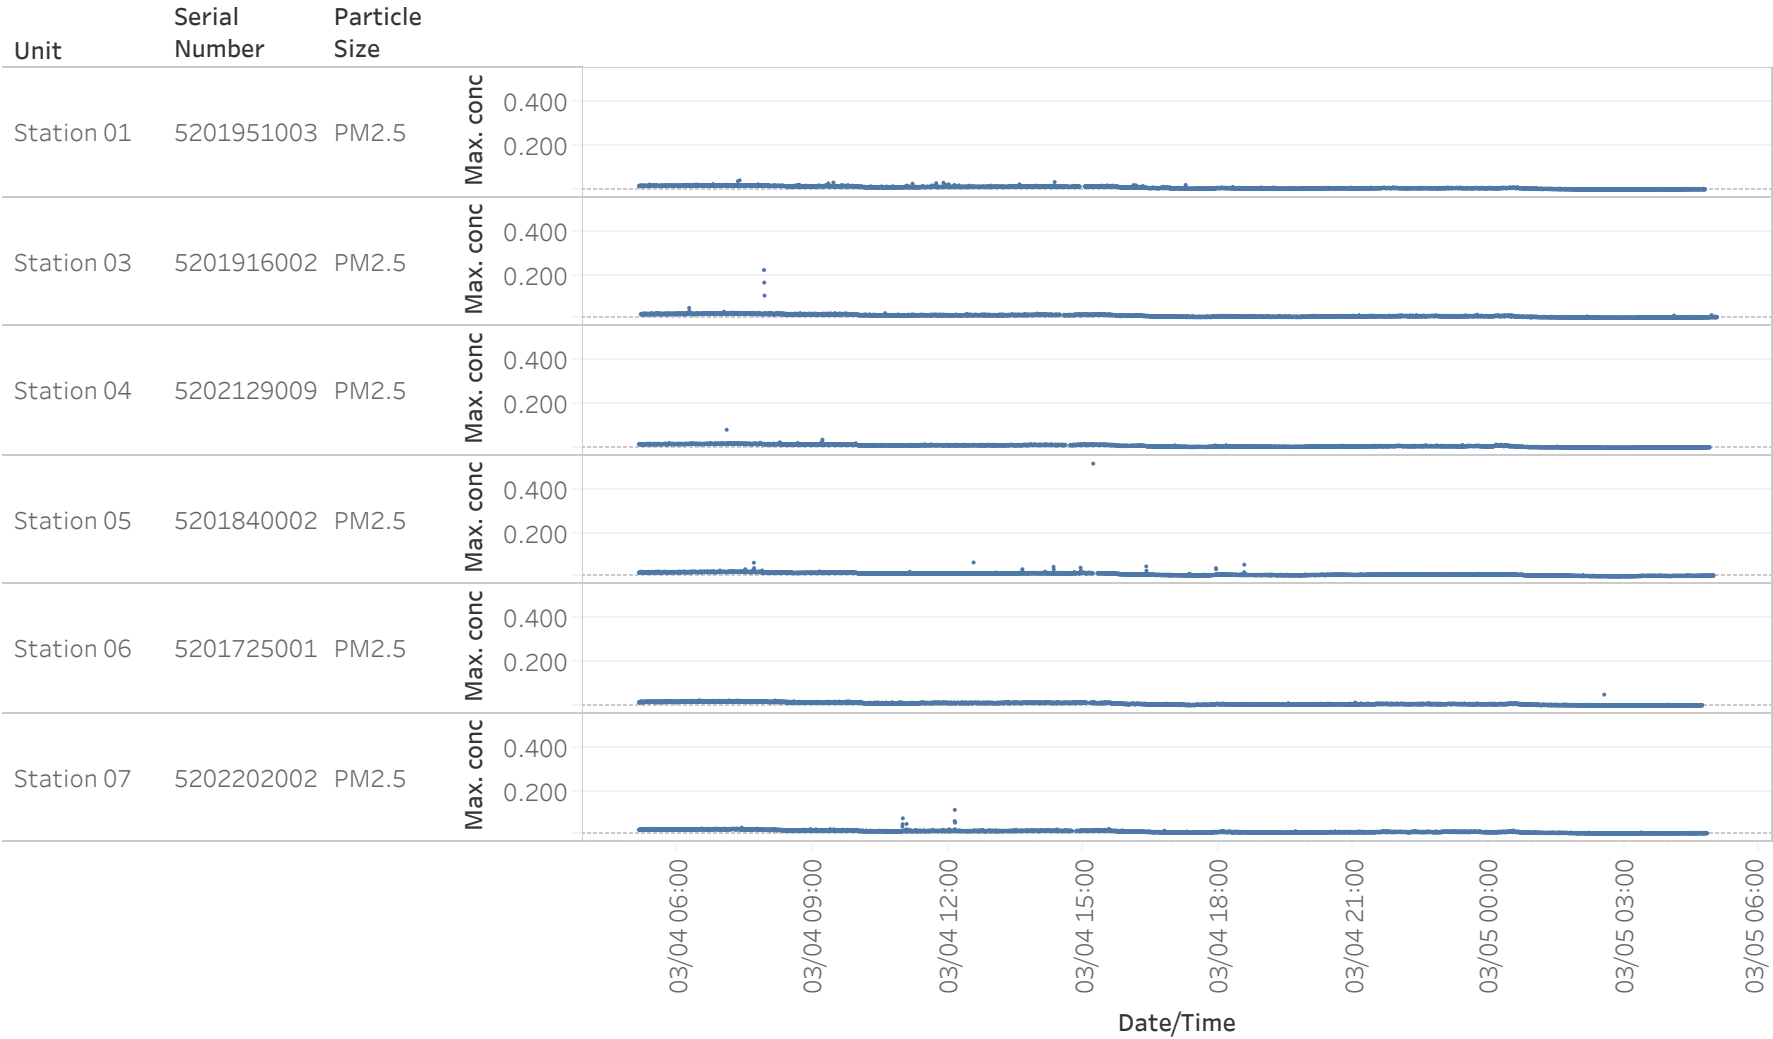

PROJ-052216 Summary Table | PM2.5

| Unit | Particle Size | Count of Records | Count of Detections | Min. concentration | Max. concentration | Avg. concentration |
|------------|---------------|------------------|---------------------|--------------------|--------------------|--------------------|
| Station 01 | PM2.5 | 5,653 | 5,653 | 0.004 | 0.047 | 0.014 |
| Station 03 | PM2.5 | 5,725 | 5,725 | 0.004 | 0.225 | 0.014 |
| Station 04 | PM2.5 | 5,678 | 5,678 | 0.003 | 0.086 | 0.013 |
| Station 05 | PM2.5 | 5,700 | 5,700 | 0.002 | 0.522 | 0.012 |
| Station 06 | PM2.5 | 5,645 | 5,645 | 0.004 | 0.055 | 0.014 |
| Station 07 | PM2.5 | 5,673 | 5,673 | 0.005 | 0.115 | 0.015 |


Attachment C

Stationary Real-Time Community Monitoring Graphs

Preliminary Fixed Station Real-time Air Monitoring Readings

PROJ-052216 | Expanded Community | SPS Technologies Fire | Abington Township, PA


3/4/2025 6:00:01 AM to 3/5/2025 4:57:00 AM | **Analyte: H2S (ppm)**

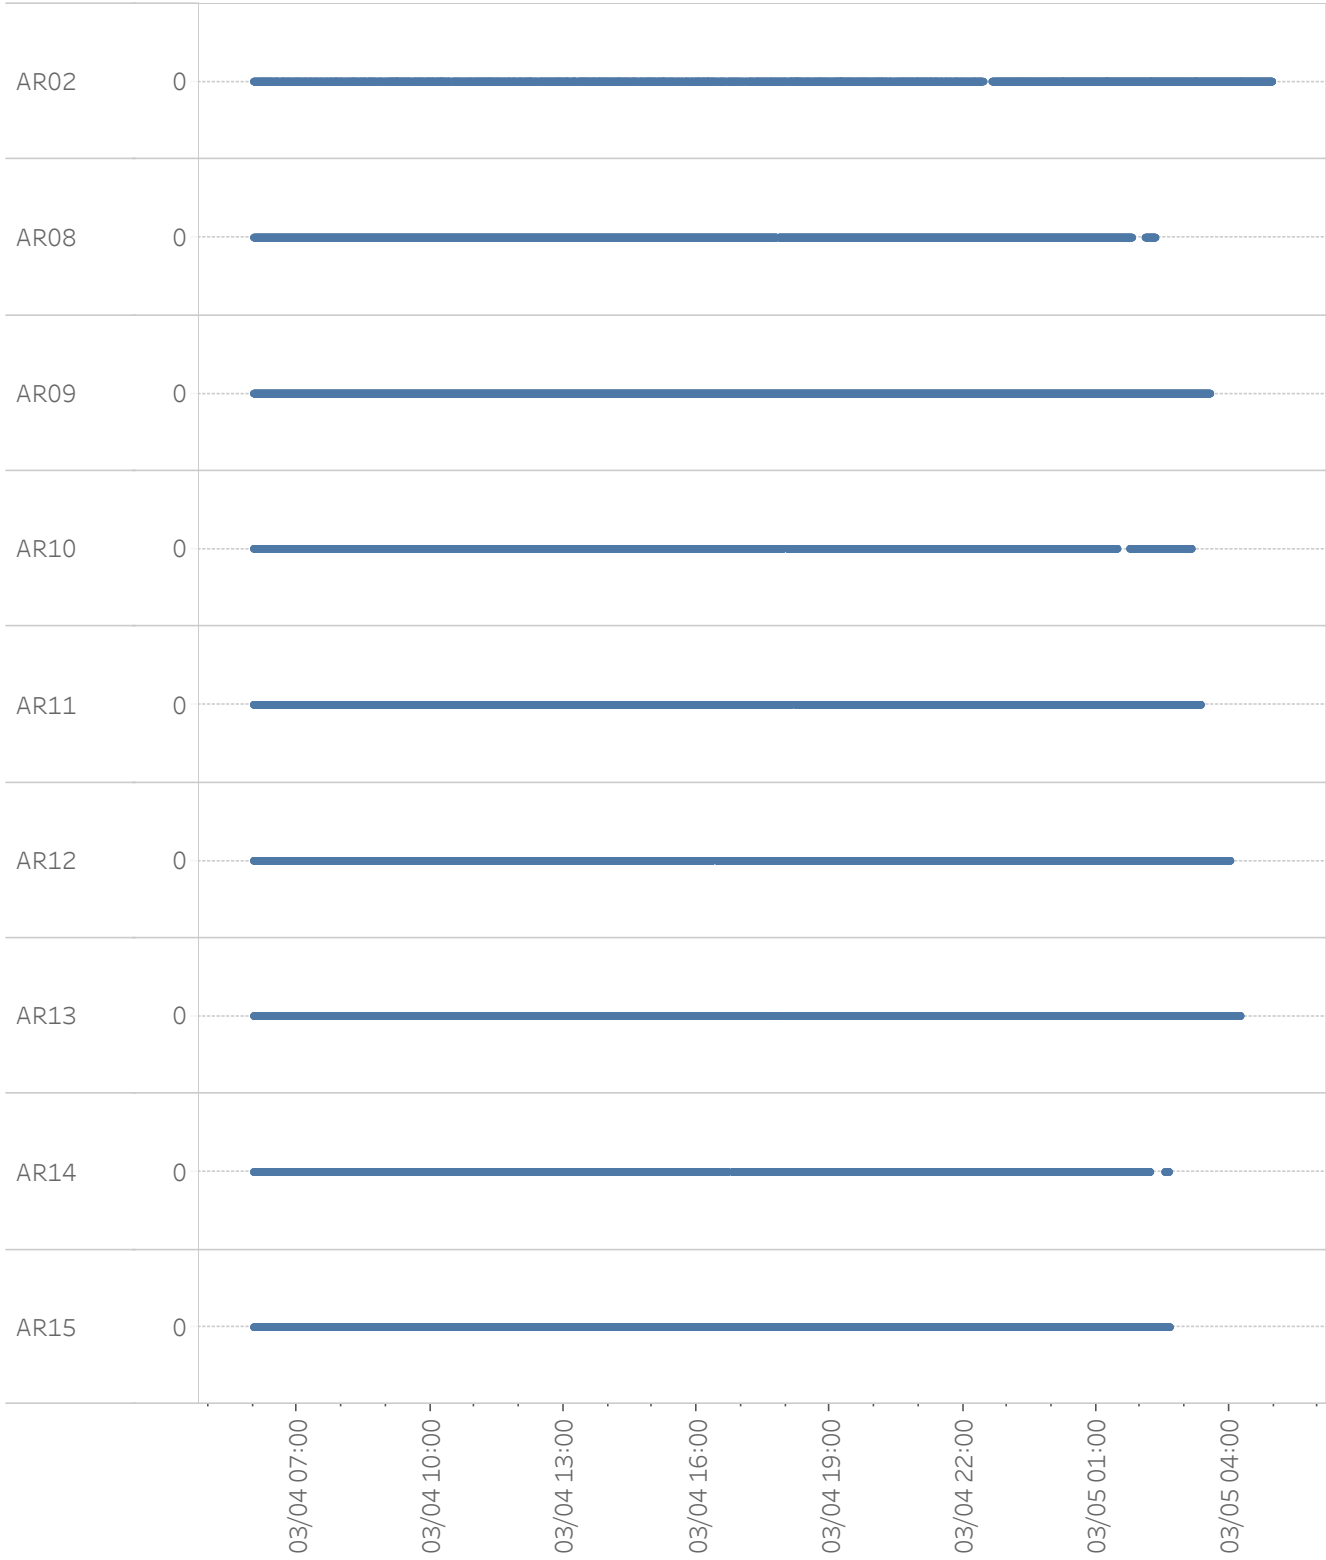

Preliminary Fixed Station Real-time Air Monitoring Readings

PROJ-052216 | Expanded Community | SPS Technologies Fire | Abington Township, PA


3/4/2025 6:00:01 AM to 3/5/2025 4:57:00 AM | **Analyte: HCN (ppm)**

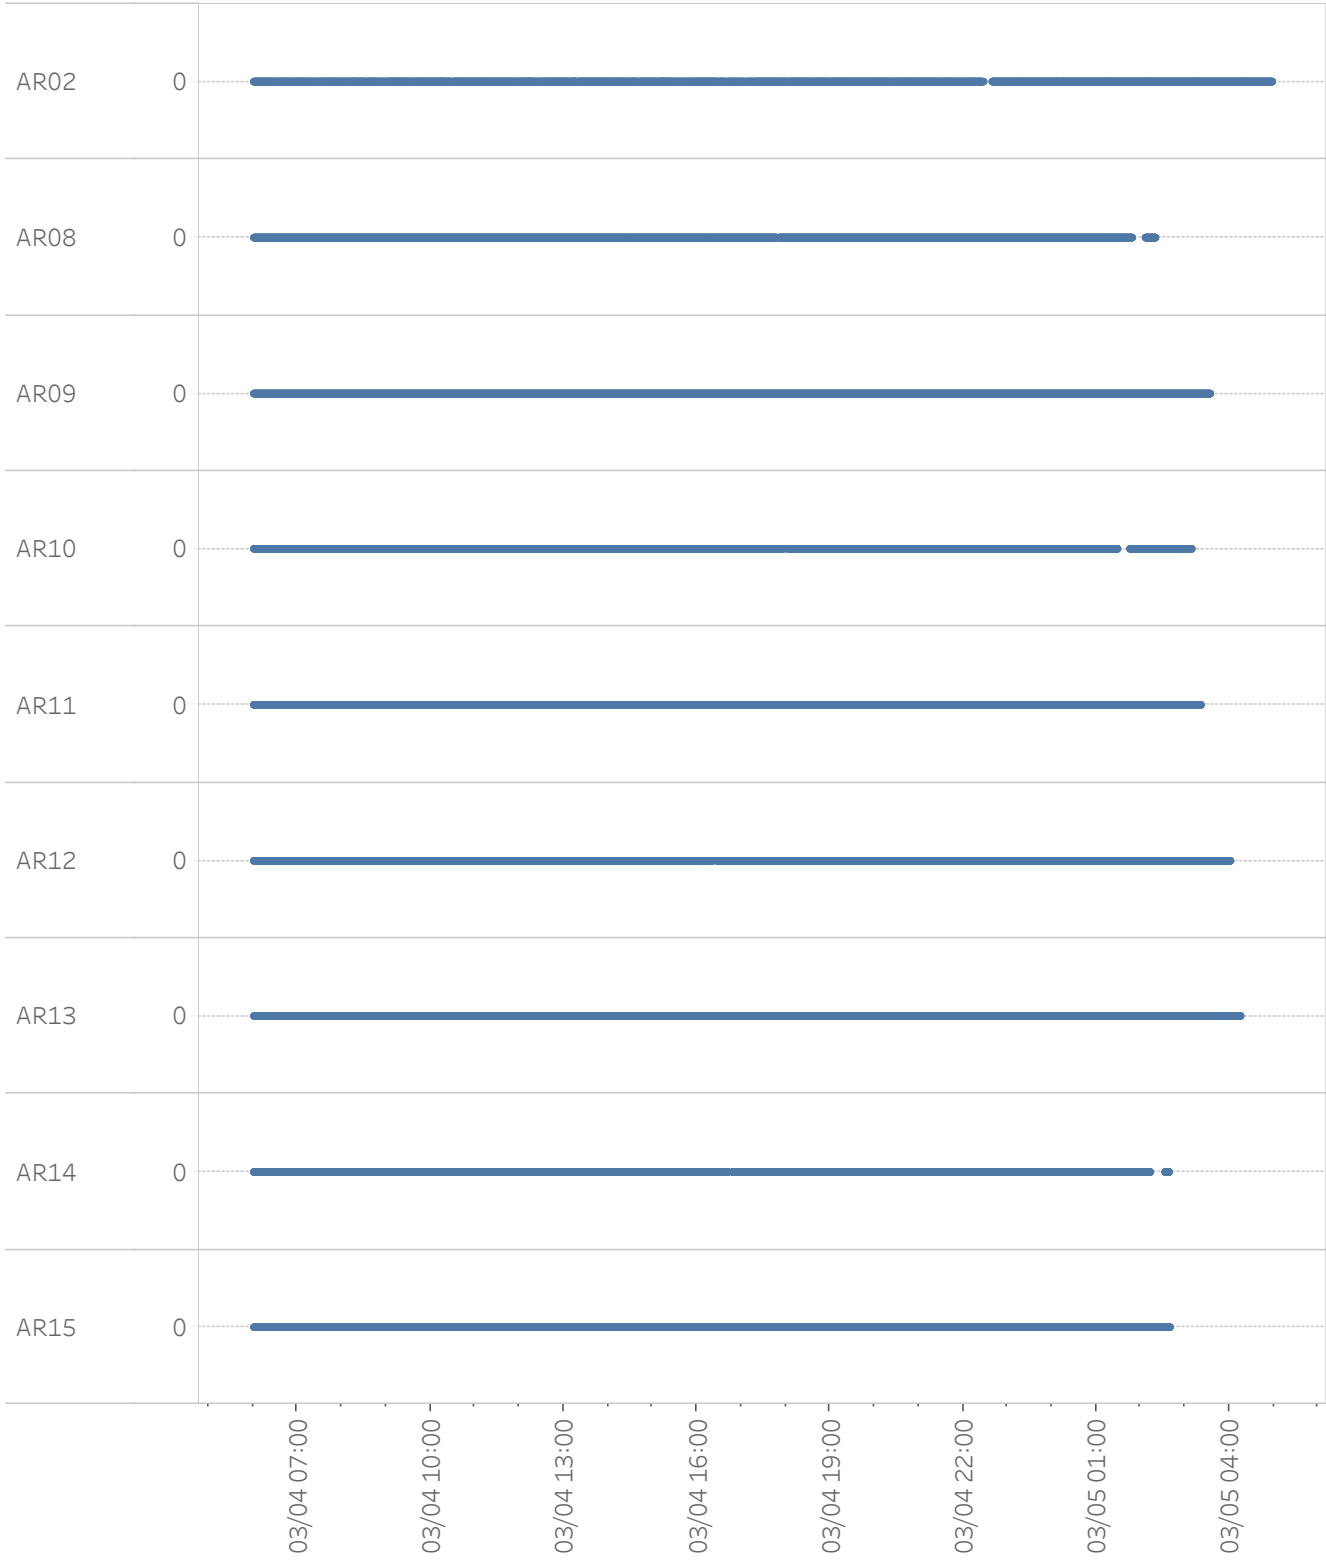

Preliminary Fixed Station Real-time Air Monitoring Readings

PROJ-052216 | Expanded Community | SPS Technologies Fire | Abington Township, PA


3/4/2025 6:00:01 AM to 3/5/2025 4:57:00 AM | Analyte: VOCs (ppm)

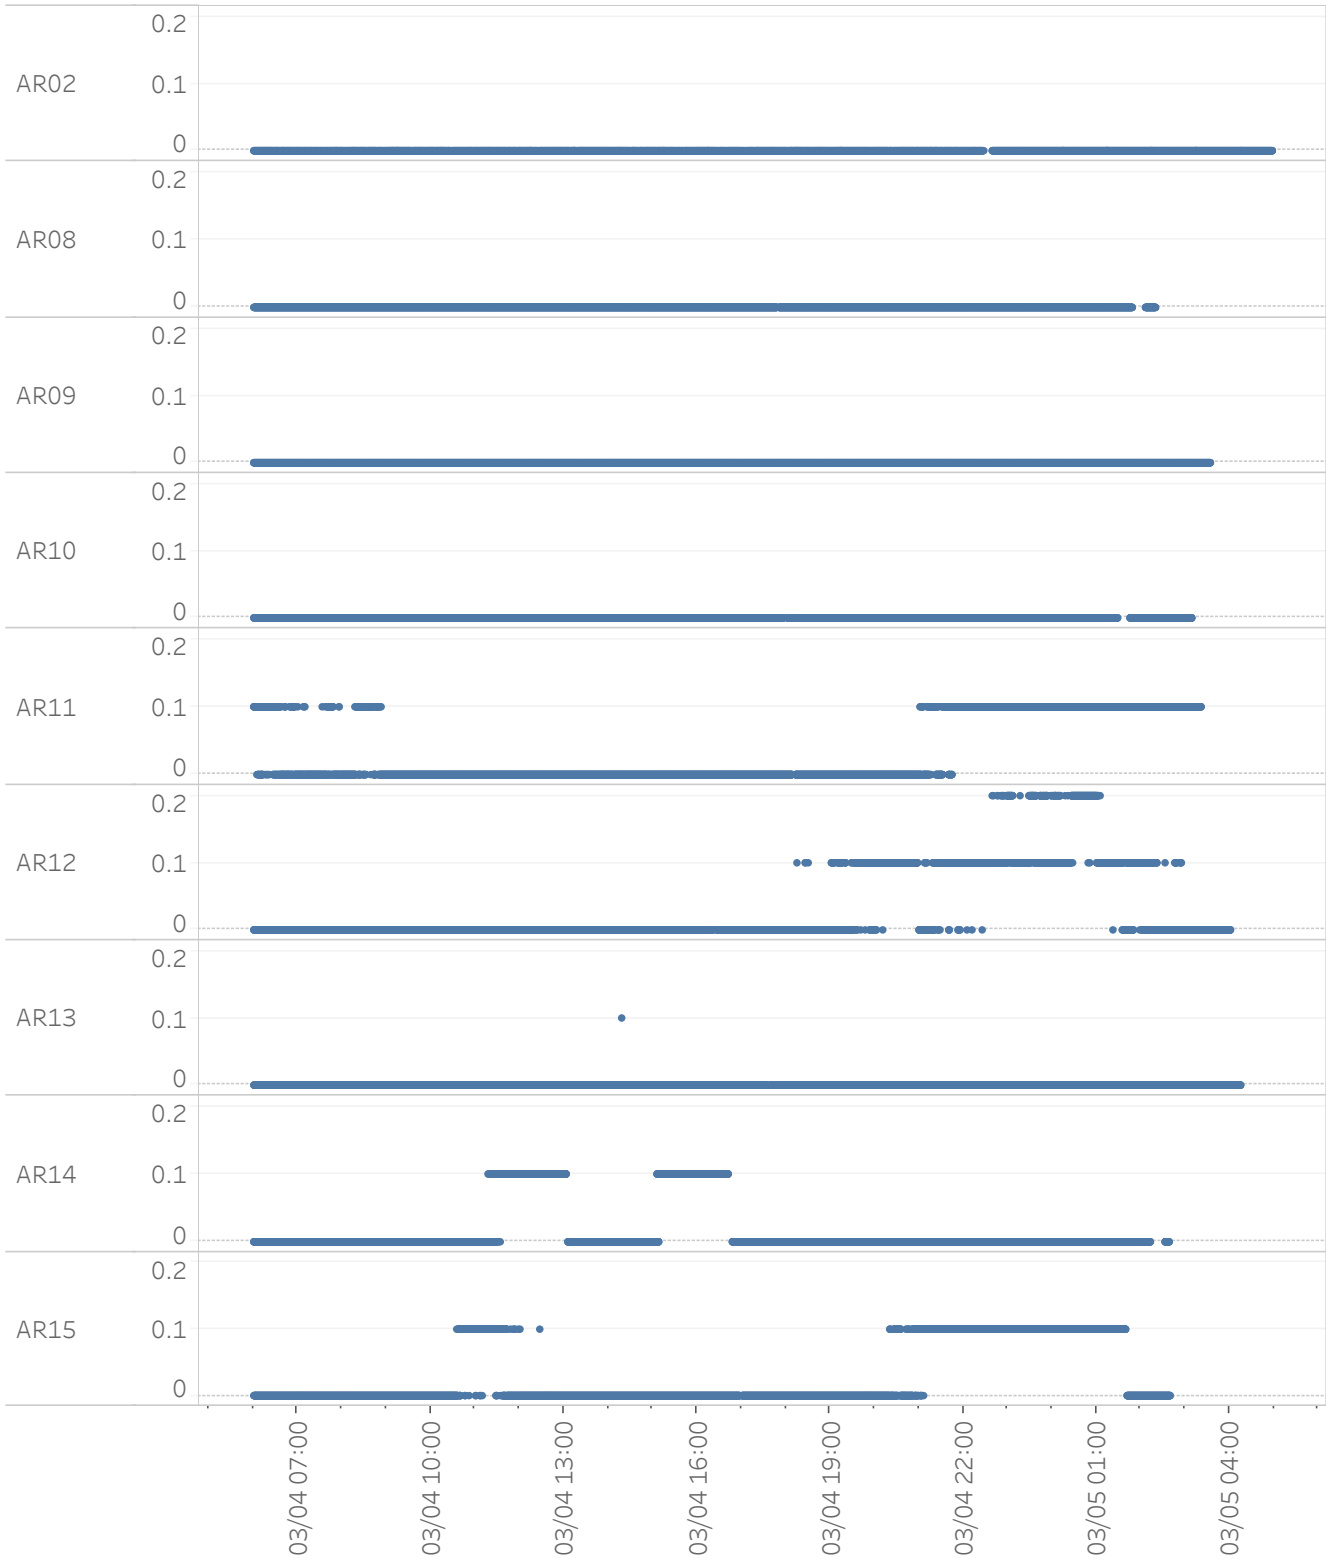

PROJ-052216 | PM2.5 Graph | Expanded Community

SPS Technologies Fire | Abington Township, PA

03/04 05:00 to 03/05 04:33

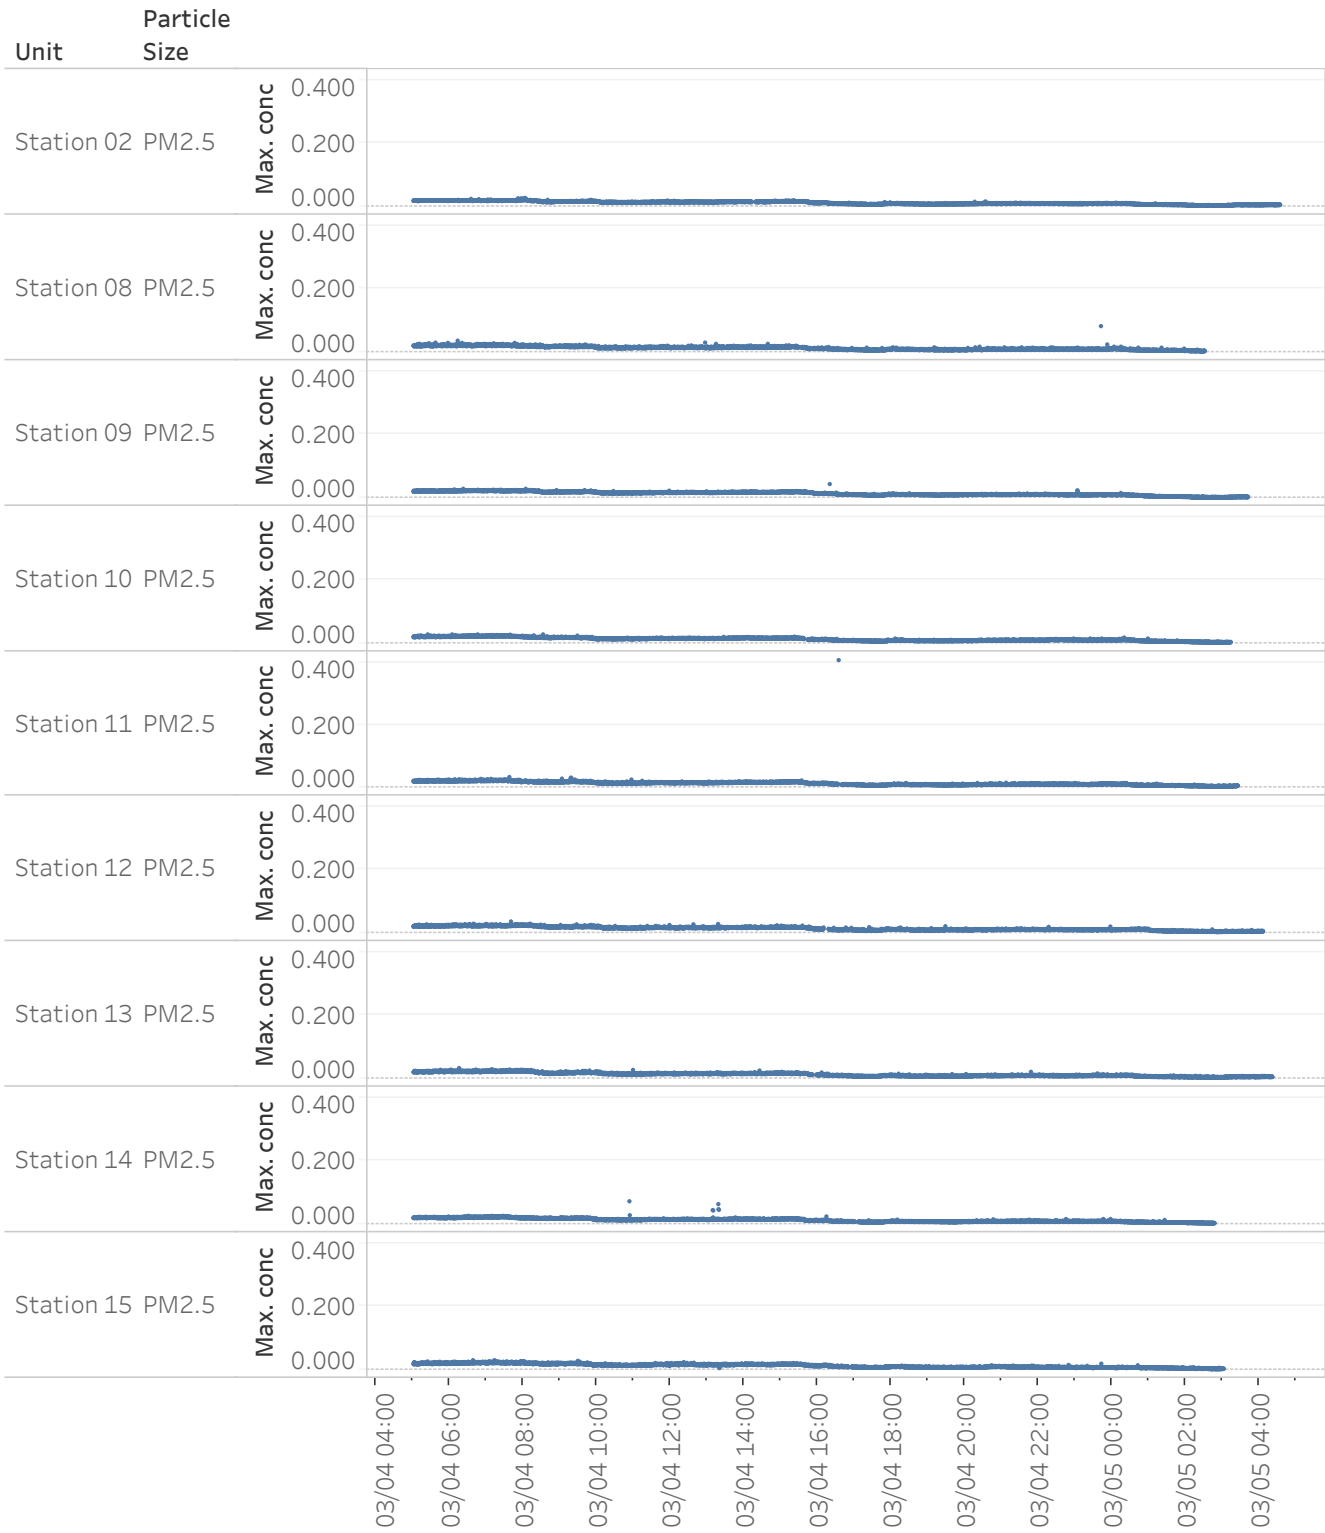

PROJ-052216 Summary Table | PM2.5 | Expanded Community

| Unit | Particle Size | Count of Records | Count of Detections | Min. concentration | Max. concentration | Avg. concentration |
|------------|---------------|------------------|---------------------|--------------------|--------------------|--------------------|
| Station 02 | PM2.5 | 5,630 | 5,630 | 0.004 | 0.028 | 0.013 |
| Station 08 | PM2.5 | 5,137 | 5,137 | 0.003 | 0.083 | 0.014 |
| Station 09 | PM2.5 | 5,429 | 5,429 | 0.002 | 0.044 | 0.014 |
| Station 10 | PM2.5 | 5,296 | 5,296 | 0.004 | 0.029 | 0.014 |
| Station 11 | PM2.5 | 5,345 | 5,345 | 0.004 | 0.407 | 0.014 |
| Station 12 | PM2.5 | 5,511 | 5,511 | 0.004 | 0.037 | 0.015 |
| Station 13 | PM2.5 | 5,567 | 5,567 | 0.004 | 0.034 | 0.014 |
| Station 14 | PM2.5 | 5,216 | 5,216 | 0.004 | 0.073 | 0.014 |
| Station 15 | PM2.5 | 5,267 | 5,267 | 0.003 | 0.031 | 0.014 |

Attachment D

Meteorological Conditions

